
Customer requirements Specification sheet:



Generic Stairway:

Customer name:		
Contact number:		
Project title:		
Date:		
Dimension 'A': Floor to ceiling		
Dimension 'B': Finished floor to finished floor		
Dimension 'C': Thickness of ceiling		
Dimension 'D': Length of aperture		
Dimension 'E': Width of aperture		
Insulated hatch required?	Yes	No
Aluminium retractable (concertina) ladder (Fig.1)	Yes	No
Wooden folding ladder (Fig.2)	Yes	No
Options Required: Fire resistance		
Options required. The resistance		
☐ Electrical operation		
☐ Electrical operation	aasa tiek antio	ne roquiro
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required
☐ Electrical operation	ease tick optio	ns required

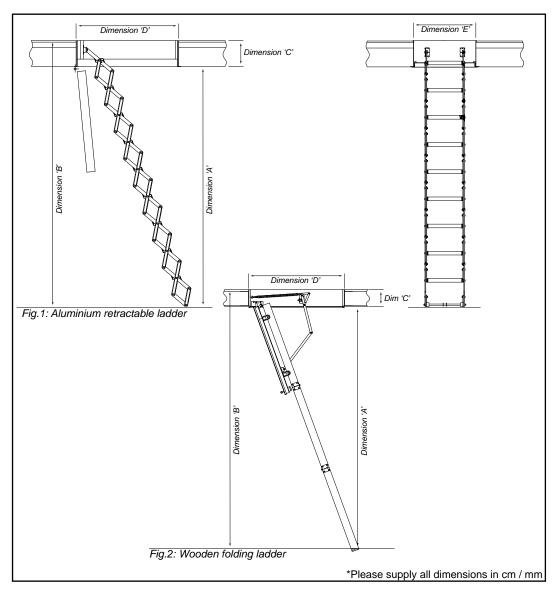

2 DAWSON DRIVE TRIMLEY St. MARY **FELIXSTOWE** SUFFOLK. IP11 OYW

TEL No.: 0845 9000 195 WWW.PREMIERLOFTLADDERS.CO.UK SALES@PREMIERLOFTLADDERS.CO.UK

Please forward a quotation toinformation detailed above.	@	based on the
Signed:		
Position:		