


Customer requirements

Specification sheet:

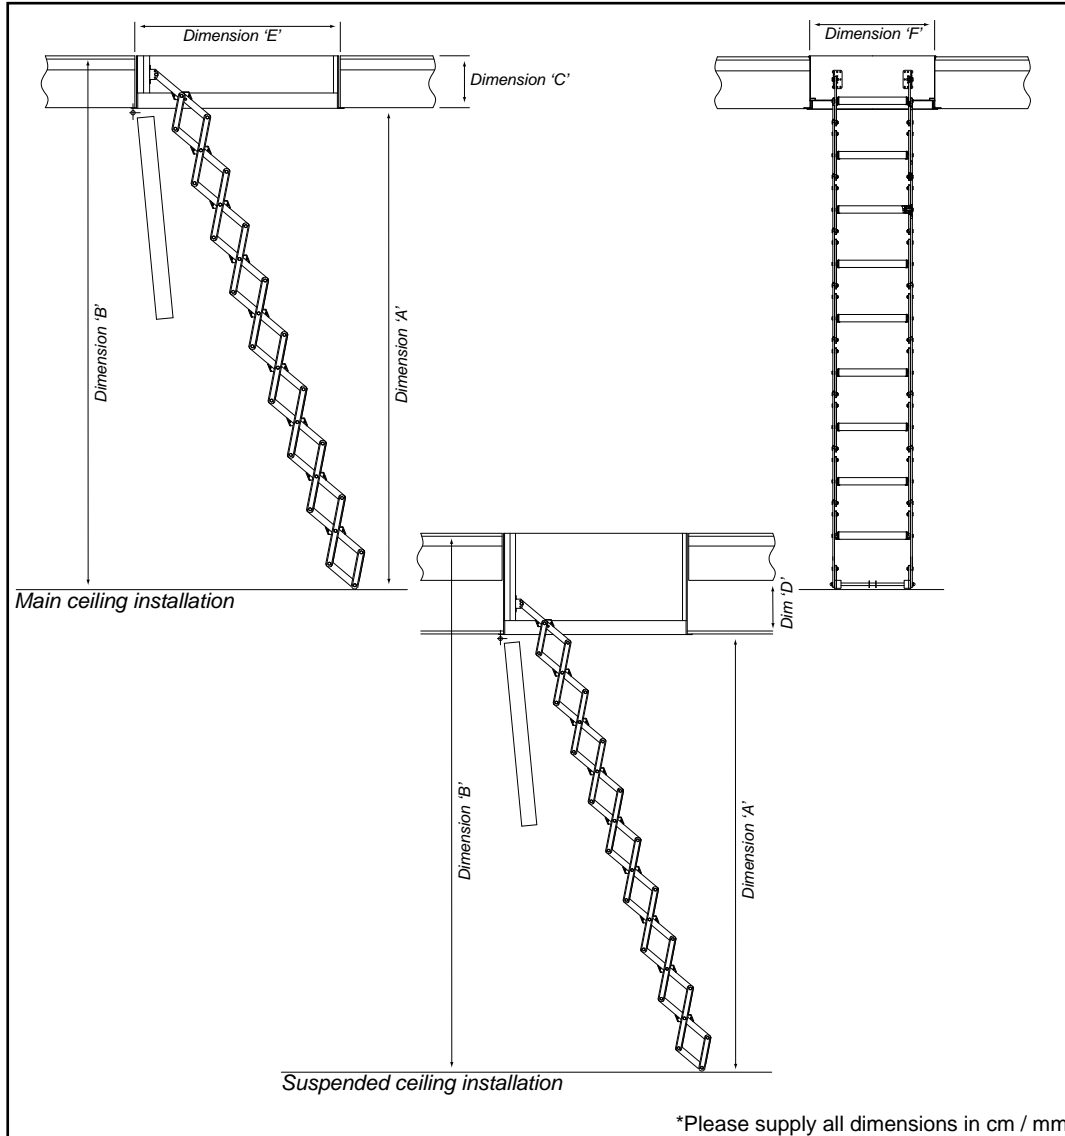

MiniLine Stairway:

with a wooden hatchbox and insulated trapdoor

MiniLine F30 / F30 Plus / F60

The MiniLine F30 / F30 Plus / F60 is supplied as a ready to fit unit, comprising of a stairway manufactured from extruded aluminium alloy components contained within, and attached to, a laminated wood hatchbox and insulated trapdoor. The trapdoor has a white finish to both sides. The unit is manufactured to EN14975 (DIN4570) and has a load bearing per tread of 150kg. The unit has a U-value of 0.92 W/m² K. The F30 is fire resistance tested from the underside, the F30 Plus is tested from above and below and the F60 is tested from below.

Please see our website or request a brochure for full product details.

Customer name:	
Contact number:	
Project title:	
Date:	
Dimension 'A': Floor to ceiling	
Dimension 'B': Finished floor to finished floor	
Dimension 'C': Thickness of ceiling	
Dimension 'D': Underside of suspended ceiling to underside of main ceiling	
Dimension 'E': Length of aperture	
Dimension 'F': Width of aperture	
Options Required:	
<input type="checkbox"/> Cylinder lock	<input type="checkbox"/> F30 (30 minutes)
<input type="checkbox"/> 3 side upper level guardrail	<input type="checkbox"/> F30 Plus (30 minutes)
<input type="checkbox"/> Telescopic handrail	<input type="checkbox"/> F60 (60 minutes)
<i>Please tick options required</i>	



2 DAWSON DRIVE
TRIMLEY St. MARY
FELIXSTOWE
SUFFOLK. IP11 OYW

TEL No.: 0845 9000 195
WWW.PREMIERLOFTLADDERS.CO.UK
SALES@PREMIERLOFTLADDERS.CO.UK

Please forward a quotation to@..... based on the information detailed above.

Signed:.....

Position:.....