
Customer requirements

PREMIER

LOFT LADDERS

Specification sheet:



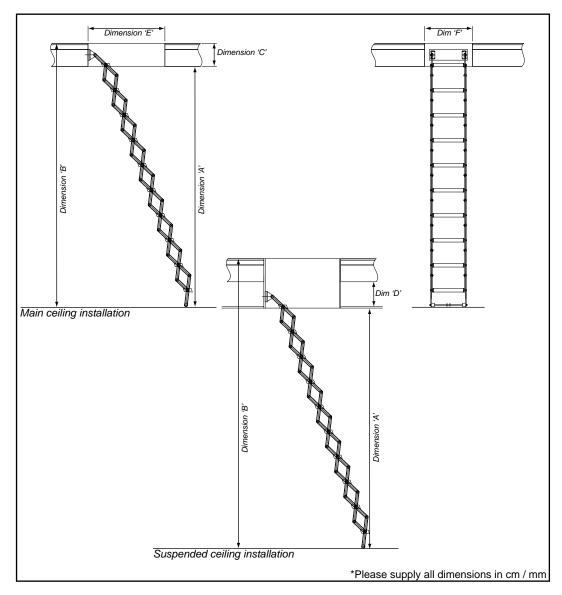

TEL No.: 0845 9000 195 WWW.PREMIERLOFTLADDERS.CO.UK SALES@PREMIERLOFTLADDERS.CO.UK

Piccolo & Piccolo Premium Stairways:

The Piccolo & Piccolo Premium are manufactured from a high strength die cast aluminium alloy, with the Piccolo Premium attached to a laminated wood backboard for fitting to a vertical surface. The standard tread width is 280mm (80mm deep) though a 300mm width is available as a special order. The Piccolo Premium is supplied with two springs to ensure that it can be raised and lowered with a minimum of effort. The unit is manufactured to EN14975 and has a load bearing per tread of 150kg.

The Piccolo Premium can also be supplied with a factory fitted accessory hinge, which will allow the unit to operate from vertical openings and mezzanine floors.

Please see our website or request a brochure for full product details.

Customer name:		
Contact number:		
Project title:		
Date:		
Dimension 'A': Floor	to ceiling	
Dimension 'B': Finis	hed floor to finished floor	
Dimension 'C': Thickness of ceiling		
Dimension 'D': Underside of suspended ceiling to underside of main ceiling		
Dimension 'E': Length of aperture		
Dimension 'F': Width of aperture		
Options Required:	☐ Spring assisted operation (Piccolo Premium)	
Specially constructed backboards (with additional treads)		,
Please tick	☐ Factory fitted accessory hinge (for a vertical opening)	
options required	☐ Special angle bracket for Piccolo (for vertical opening)	

