

Customer requirements

Specification sheet:

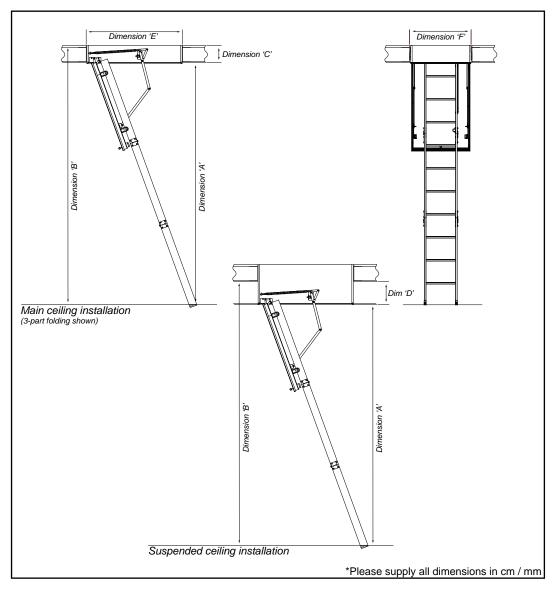



3-part folding or 2-part sliding wooden ladder

Profiline F30 / F30 Plus / F60

The Profiline F30 / F30 Plus / F60 is a 3-part folding or 2-part sliding wooden ladder. It is a ready to fit unit complete with a trapdoor and hatchbox that has an all-round rubber seal. The hatchbox is manufactured from 16mm thick white covered chipboard. The trapdoor is a sandwich construction, with the F30 being 65mm thick and the F60 being 71mm thick. The trapdoor has a white finish to both sides. The unit has a U-value of 0.92 W/m²K. The F30 is fire resistant tested from the underside, the F30 Plus is tested from above and below and the F60 is tested from below.

Please see our website or request a brochure for full product details.

Customer name:	
Contact number:	
Project title:	
Date:	
Dimension 'A': Floor to ceiling	
Dimension 'B': Finished floor to finished floor	
Dimension 'C': Thickness of ceiling	
Dimension 'D': Underside of suspended ceiling to underside of main ceilin	g
Dimension 'E': Length of aperture	
Dimension 'F': Width of aperture	
Ontions Descripted Destiling F20	
Options Required: ☐ Profiline F30 ☐ Profiline F30 Plus	
□ Profiline F60	
☐ Profiline 2-part sliding ladder Profiline 2-part sliding ladder	ease tick options required



2 DAWSON DRIVE TRIMLEY St. MARY FELIXSTOWE SUFFOLK. IP11 OYW

TEL No.: 0845 9000 195 WWW.PREMIERLOFTLADDERS.CO.UK SALES@PREMIERLOFTLADDERS.CO.UK

Please forward a quotation toinformation detailed above.	@	based on the
Signed:		
Position:		