


Customer requirements

Specification sheet:

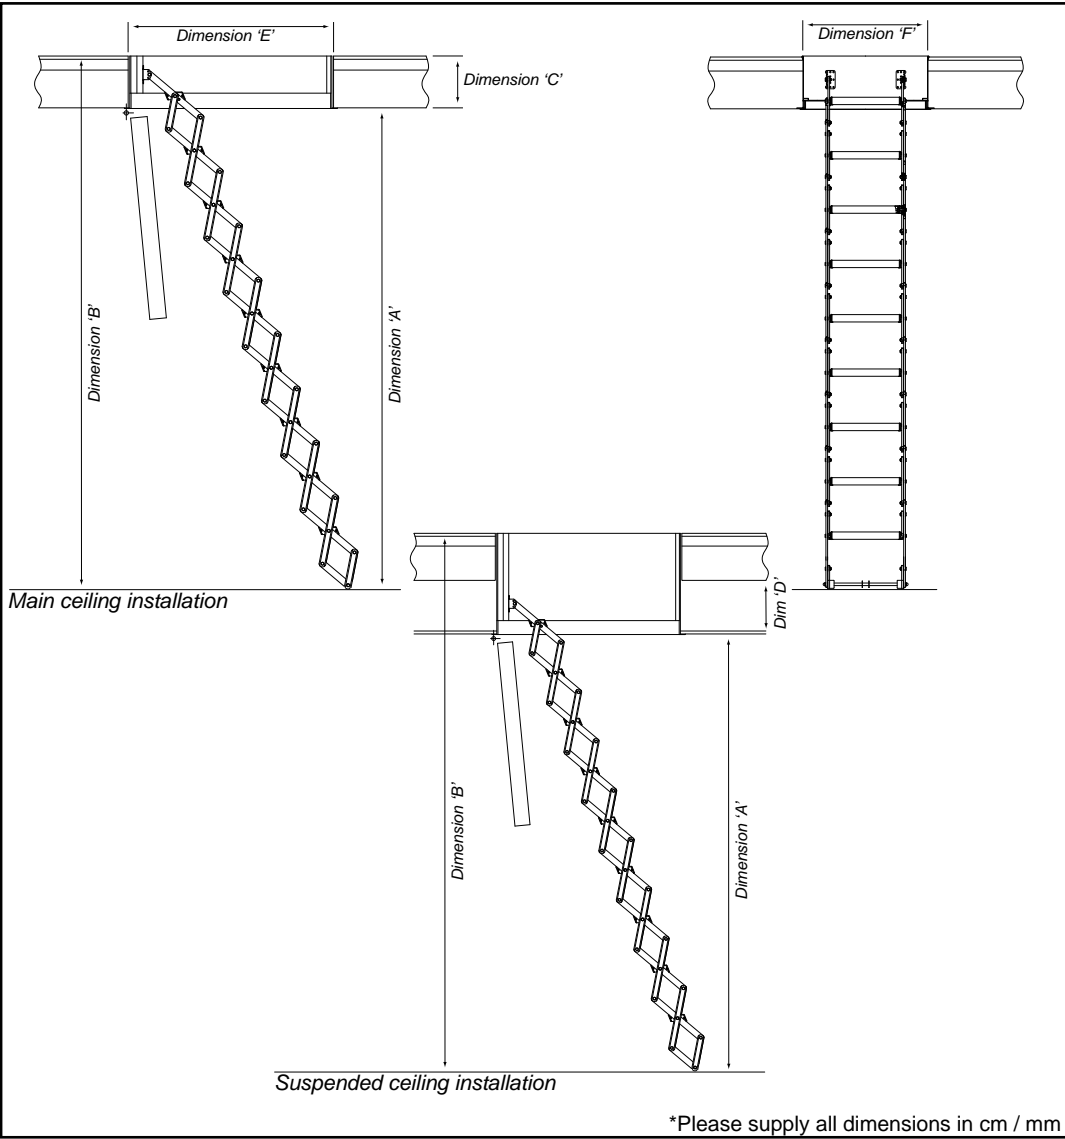

Supreme Stairway:

with wooden hatchbox and insulated trapdoor F30

Supreme stairway with a wooden hatchbox and insulated trapdoor F30
 U-value 0.8 W/m² K. Ready to fit unit, comprising of a stairway manufactured from high strength die-cast aluminium alloy components contained within, and attached to a 19mm Pyroex chipboard hatchbox and 28mm Pyroex coated chipboard insulated trapdoor - F30. Manufactured to EN14975 (DIN 4570) with a load bearing per tread of 200kg. Fire resistant to DIN 4102 Part 2.

Please see our website or request a brochure for full product details.

Customer name:	
Contact number:	
Project title:	
Date:	
Dimension 'A': Floor to ceiling	
Dimension 'B': Finished floor to finished floor	
Dimension 'C': Thickness of ceiling	
Dimension 'D': Underside of suspended ceiling to underside of main ceiling	
Dimension 'E': Length of aperture	
Dimension 'F': Width of aperture	
Model Required:	
Options Required: <input type="checkbox"/> Handrail on <u>left</u> or <u>right</u>	
<input type="checkbox"/> 3 side upper level guardrail	
<i>Please tick options required</i>	



2 DAWSON DRIVE
 TRIMLEY St. MARY
 FELIXSTOWE
 SUFFOLK. IP11 OYW

TEL No.: 0845 9000 195
 WWW.PREMIERLOFTLADDERS.CO.UK
 SALES@PREMIERLOFTLADDERS.CO.UK

Please forward a quotation to@..... based on the information detailed above.

Signed:.....

Position:.....