


Customer requirements

Specification sheet:

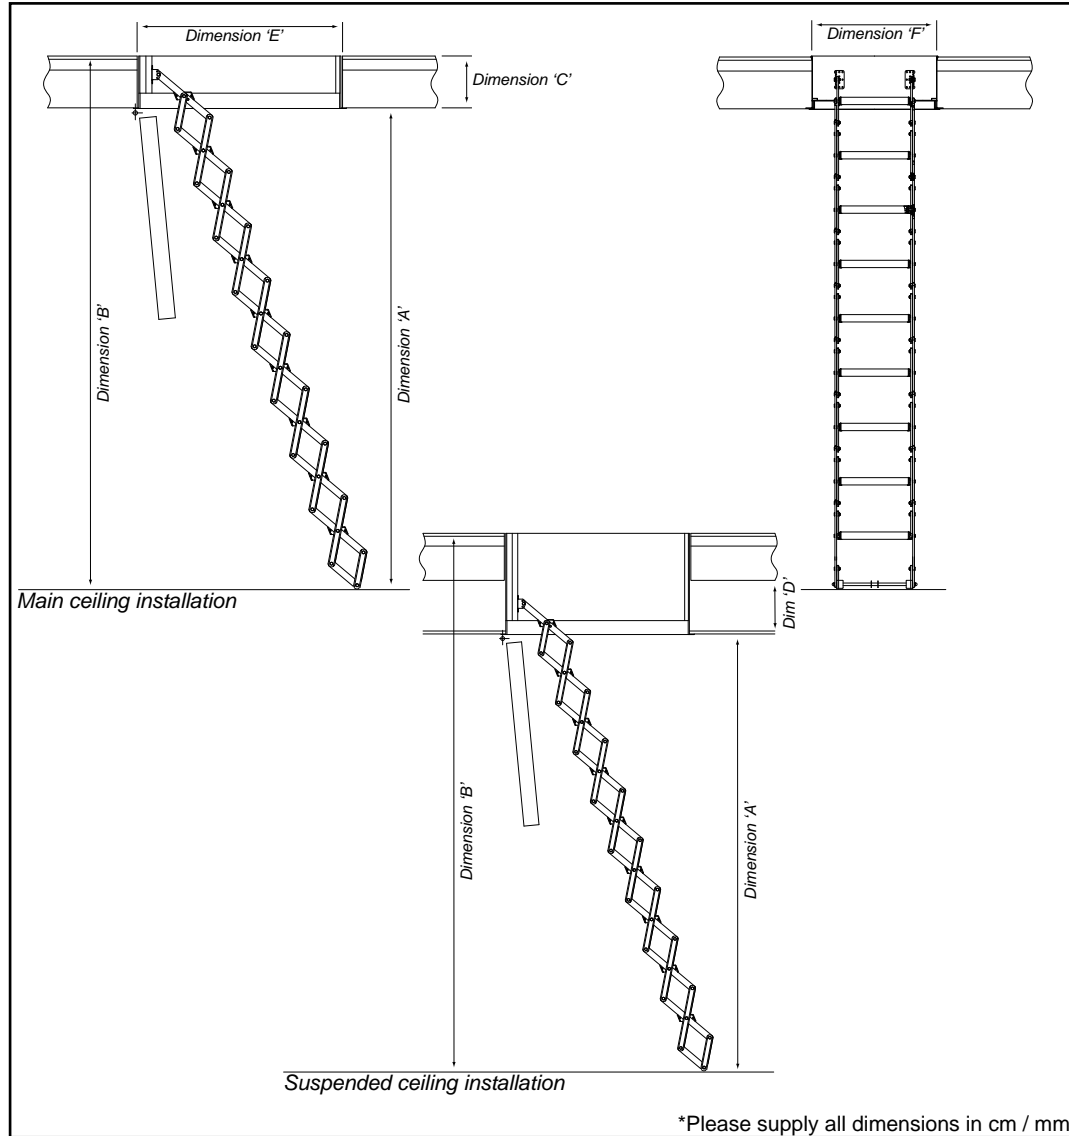

Supreme Electric Stairway:

with a wooden hatchbox and insulated trapdoor - electrically operated

U-value 0.58 W/m² K, with Class 4 certified airtight seal. Ready to fit unit, comprising of a stairway manufactured from high strength die-cast aluminium alloy components contained within, and attached to, a laminated wood hatchbox and insulated trapdoor. The trapdoor has a white finish to the underside. The stairway is operated by a 24V DC motor and supplied with one switch. It is also supplied complete with a standby battery, transformer and wiring. Load bearing per tread of 200kg.

Please see our website or request a brochure for full product details.

| | |
|--|--|
| Customer name: | |
| Contact number: | |
| Project title: | |
| Date: | |
| Dimension 'A': Floor to ceiling | |
| Dimension 'B': Finished floor to finished floor | |
| Dimension 'C': Thickness of ceiling | |
| Dimension 'D': Underside of suspended ceiling to underside of main ceiling | |
| Dimension 'E': Length of aperture | |
| Dimension 'F': Width of aperture | |
| Model Required: | |
| Options Required: <input type="checkbox"/> Remote control <input type="checkbox"/> Telescopic handrail on <input type="checkbox"/> left or <input type="checkbox"/> right or <input type="checkbox"/> both | |
| <input type="checkbox"/> Lockable switch <input type="checkbox"/> 3 side upper level guardrail | |
| <input type="checkbox"/> Additional wall switch <input type="checkbox"/> Passivhaus version with upper hatch (please note 'C' is minimum 630mm) | |
| <i>Please tick options required</i> <input type="checkbox"/> Powder coating | |



2 DAWSON DRIVE
TRIMLEY St. MARY
FELIXSTOWE
SUFFOLK. IP11 OYW

TEL No.: 0845 9000 195
WWW.PREMIERLOFTLADDERS.CO.UK
SALES@PREMIERLOFTLADDERS.CO.UK

Please forward a quotation to@..... based on the information detailed above.

Signed:.....

Position:.....