

Supreme with steel hatchbox F30, with 1 additional tread

Ready to install element
Safety tested: tested according to DIN EN 14975 by TÜV Süd

Thermal properties: U - Value lower cover F30 = 0.57 W/m² K
 Calculation of the isolated area according to DIN EN ISO 6946 by manufacturer


Stairs:
 Scissor unit: die-cast aluminium
 Load bearing capacity per tread 200 kg or 500 kg / m² of the entire component
 Tread depth 14 cm (16 cm)

Custom sizes:
 Custom sizes are available on request

Aperture length depends on the number of treads		Space required in cm		
Treads	Aperture size (length)	Floor to ceiling height "A"	Setdown point "B"	Swivel range "C"
9	101.5 - 161.5	220 - 250	129 - 123	136
10	101.5 - 161.5	250 - 279	139 - 133	146
11	111.5 - 161.5	279 - 309	149 - 142	156
12	111.5 - 161.5	309 - 339	159 - 151	167
13	141.5 - 161.5	339 - 369	186 - 178	192
14	151.5 - 161.5	369 - 399	197 - 189	203
15	161.5 - 161.5	399 - 430	208 - 199	215

Hatchbox external dimensions = aperture size - 1.5cm

Insulation installed on site "D" max.	U - Value W/m ² K	Seal type
35 mm	1.1	Single seal
40 mm	0.68	Double seal
80 mm	0.38	Double seal
100 mm	0.31	Double seal

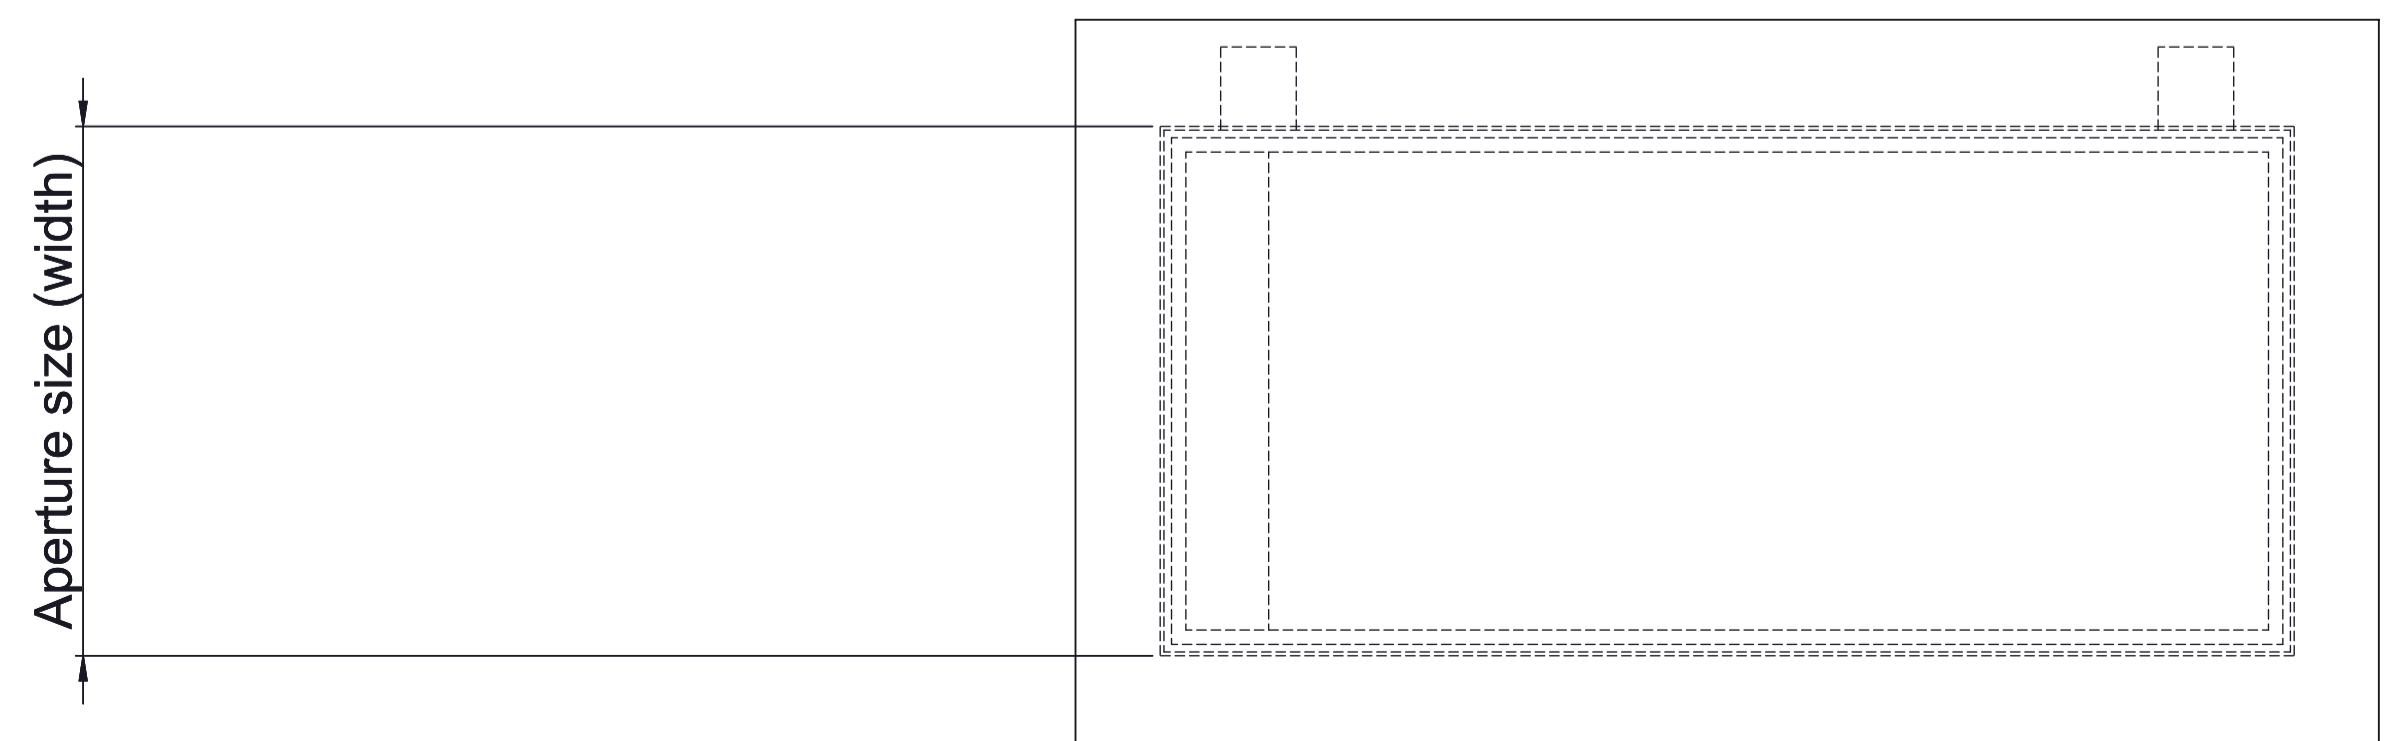

PREMIER LOFT LADDERS
 2 Dawson Drive,
 Trimley St Mary,
 Felixstowe, Suffolk. IP11 0YW
 Tel: 0845 9000 195
 Fax: 01394 214413
 www.premierloftladders.co.uk

Rev	Date	Name	Scale
A	10.10.2014	JP	1:10

Other sizes and different ceiling heights are available on request

6000216

The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.

NOTE: ALL INFORMATION CONTAINED IN THIS DOCUMENT IS STRICTLY CONFIDENTIAL. THIS DRAWING IS THE PROPERTY OF PREMIER LOFT LADDERS AND MUST NOT BE REPRODUCED WITHOUT PRIOR PERMISSION.