
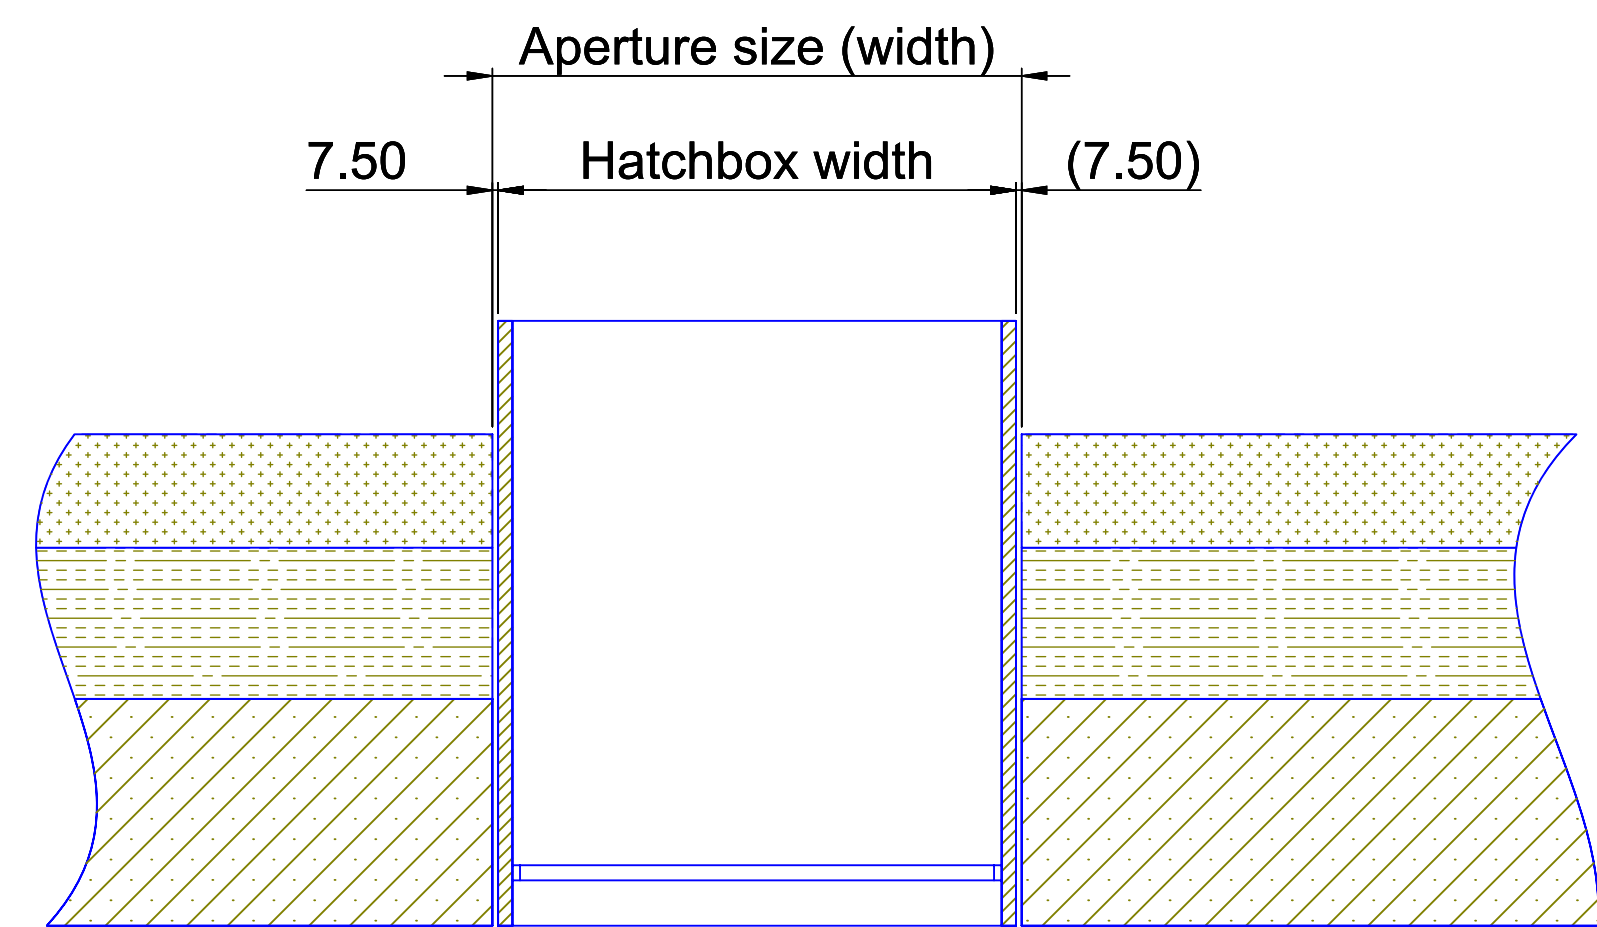


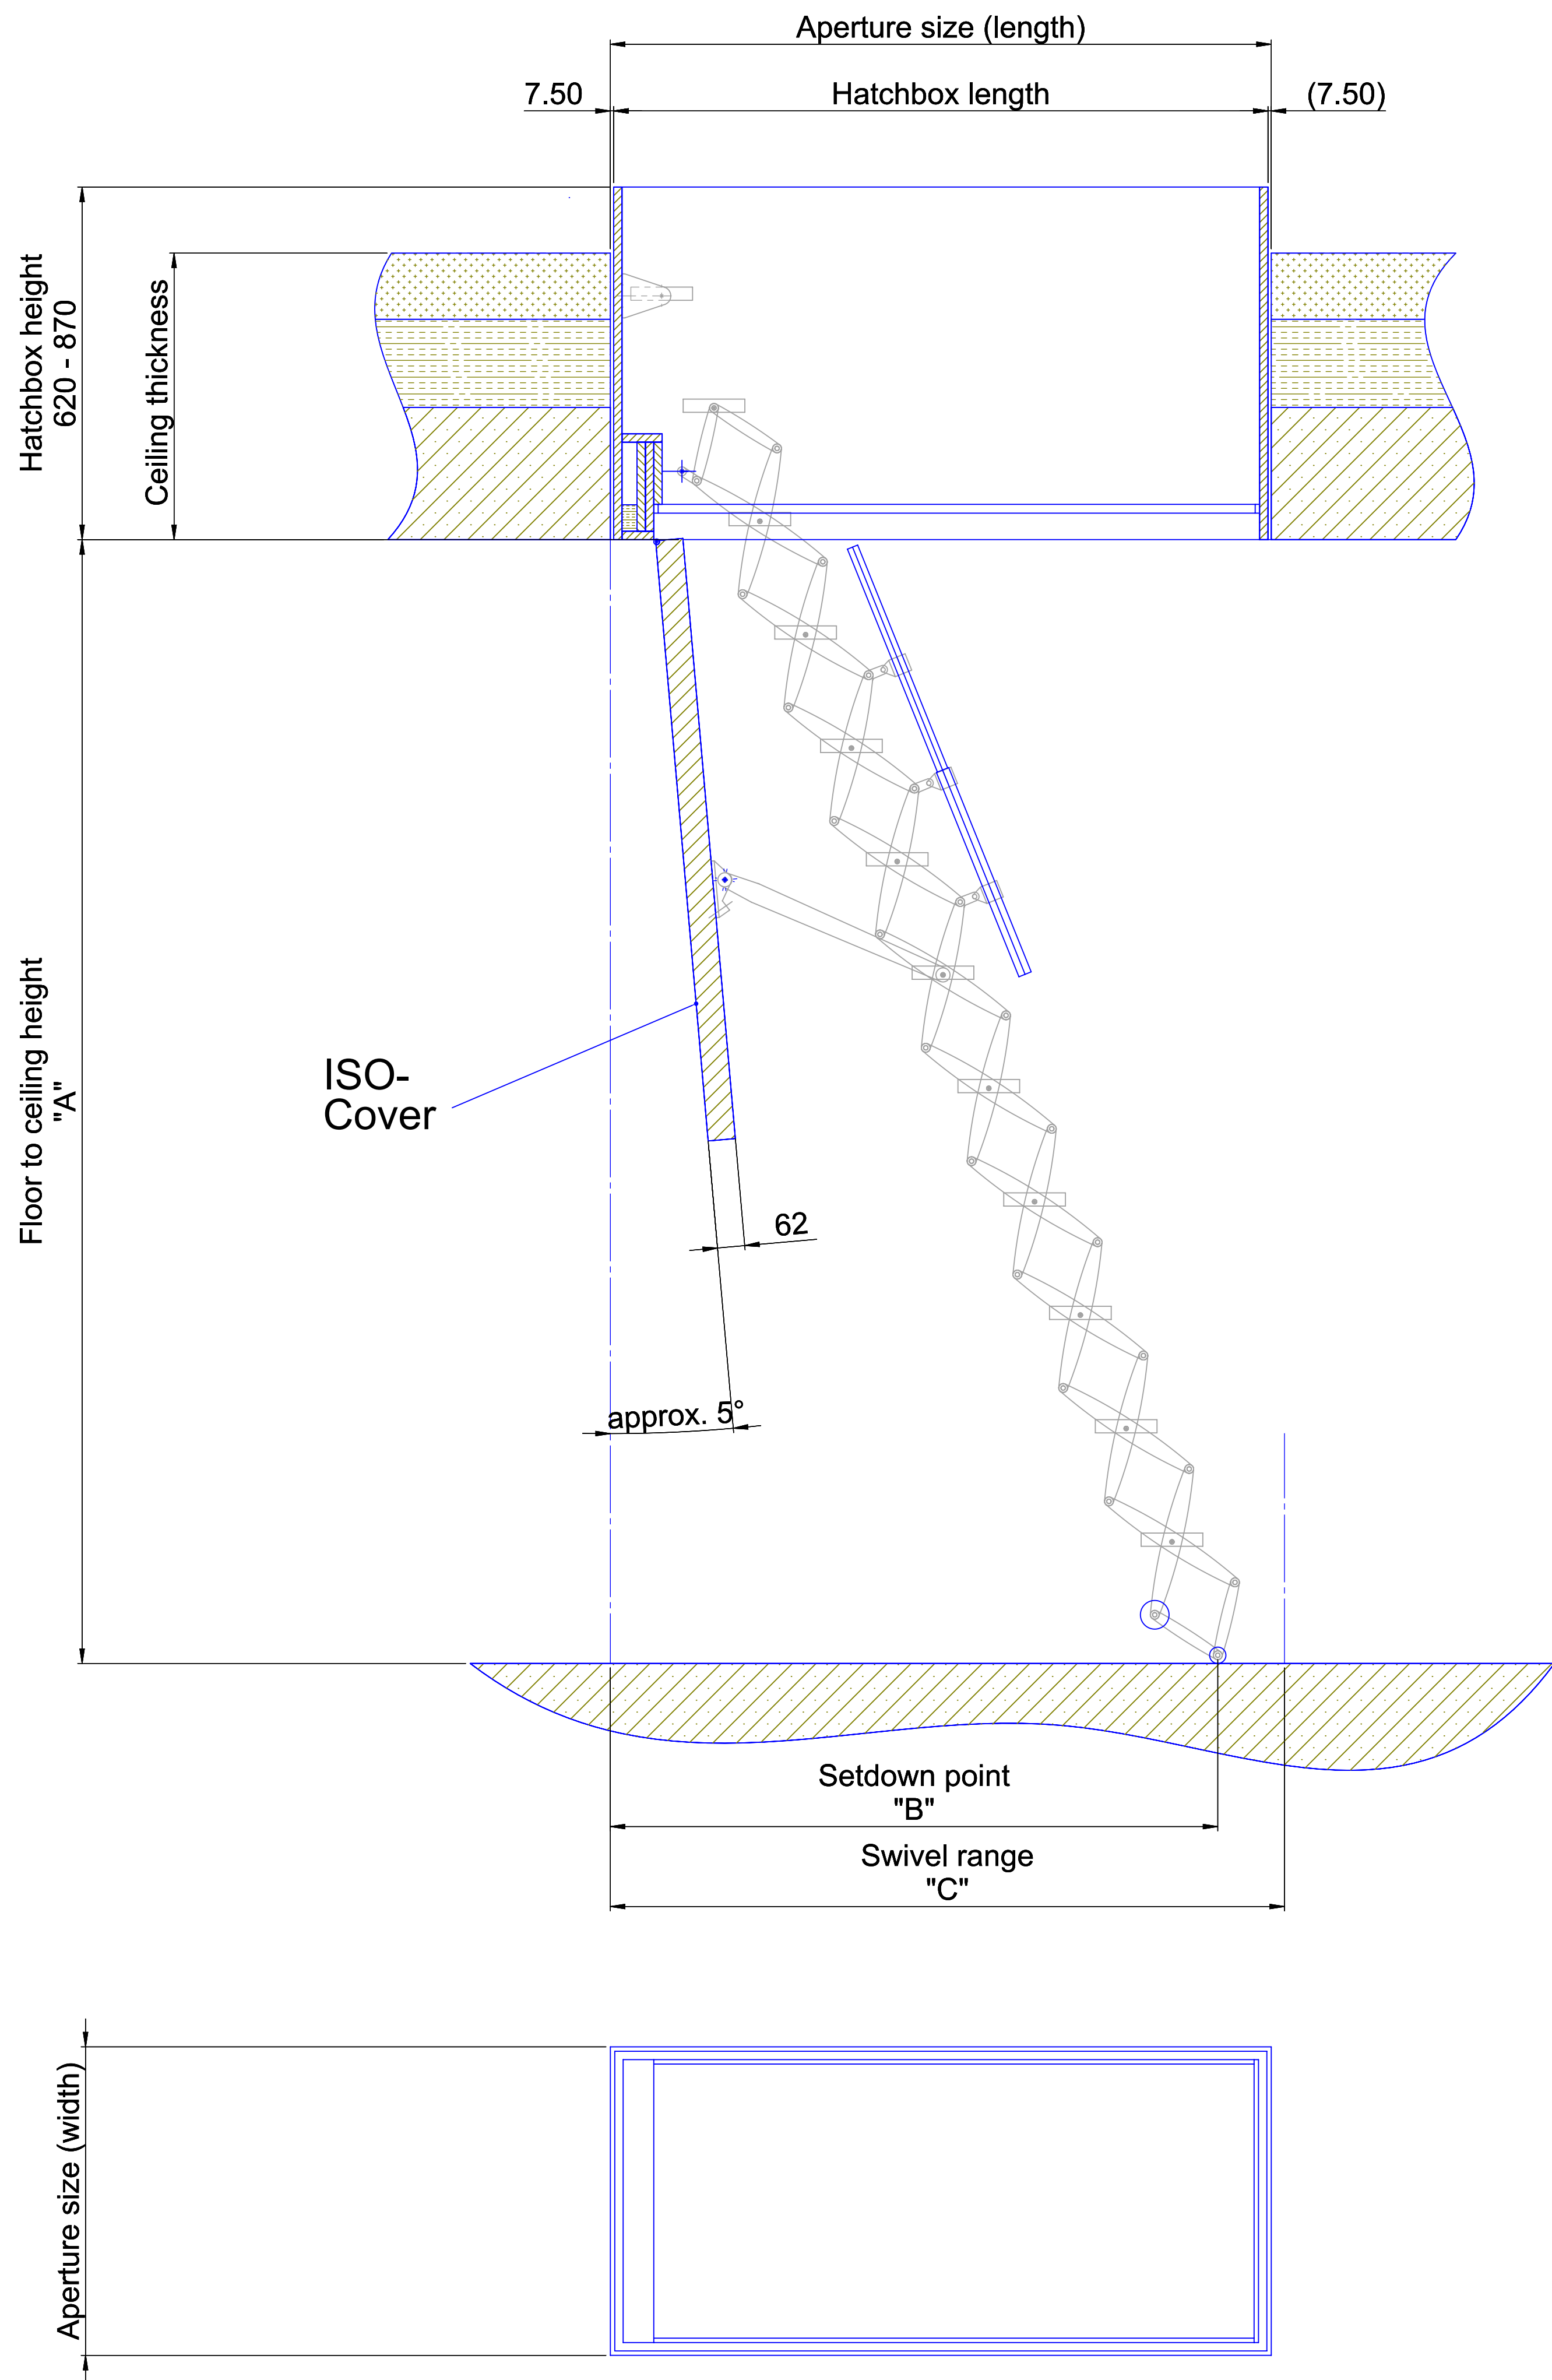

Supreme with wooden hatchbox, 2 additional treads

Ready to install element
Safety tested: tested according to DIN EN 14975 by TÜV Süd

Airtightness (a value): class 4 - According to DIN EN 12114, DIN EN 1026, DIN EN 12207 by ift Rosenheim

Thermal properties: U - Value = 0.58 W/m² K according to EN ISO 12567-1 by ift Rosenheim

Stairs:
Scissor unit: die-cast aluminium
Load bearing capacity per tread 200 kg or 500 kg / m² of the entire component
Tread depth 14 cm (16 cm)

Custom sizes:
Custom sizes are available on request

Aperture length depends on the number of treads		Space required in cm		
Treads	Aperture size (length)	Floor to ceiling height "A"	Set down point "B"	Swivel range "C"
9	101.5 - 171	220 - 250	132 - 119	141
10	101.5 - 171	250 - 279	141 - 127	152
11	111.5 - 171	279 - 309	151 - 136	163
12	111.5 - 171	309 - 339	160 - 144	175
13	141.5 - 171	339 - 369	186 - 172	200
14	151.5 - 171	369 - 399	197 - 181	213
15	161.5 - 171	399 - 430	207 - 190	225
Hatchbox external dimensions = aperture size -1.5cm				

Standard sizes	
Aperture size length x width	Tread width
120 x 60 cm	25 cm
120 x 70 cm	35 cm
130 x 70 cm	35 cm
140 x 70 cm	35 cm



PREMIER LOFT LADDERS
2 Dawson Drive,
Trimley St Mary,
Felixstowe, Suffolk. IP11 0YW

Tel: 0845 9000 195
Fax: 01394 214413
www.premierloftladders.co.uk

© All rights reserved. Report all discrepancies. Do not scale drawings.

Test Issue	Date	Name
A	07.01.2013	Ra
B	14.09.2013	JP
	10.08.2014	JP

Other sizes and different ceiling heights are available on request

Supreme with wooden hatchbox, 2 additional treads

6000223

The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.

Scale 1:10