
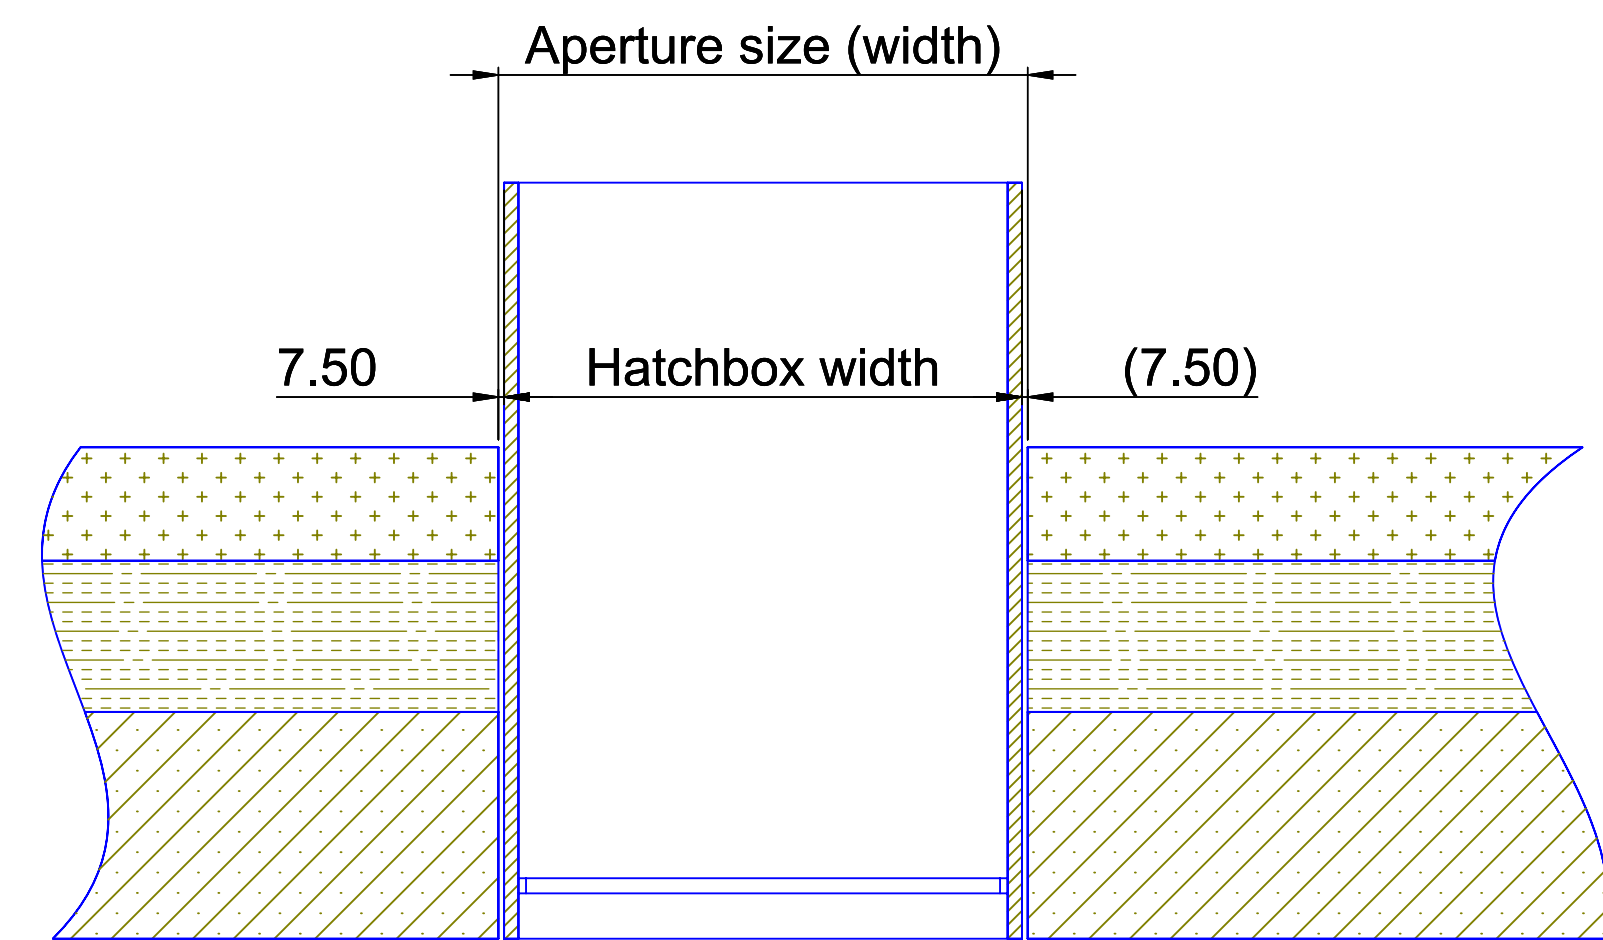


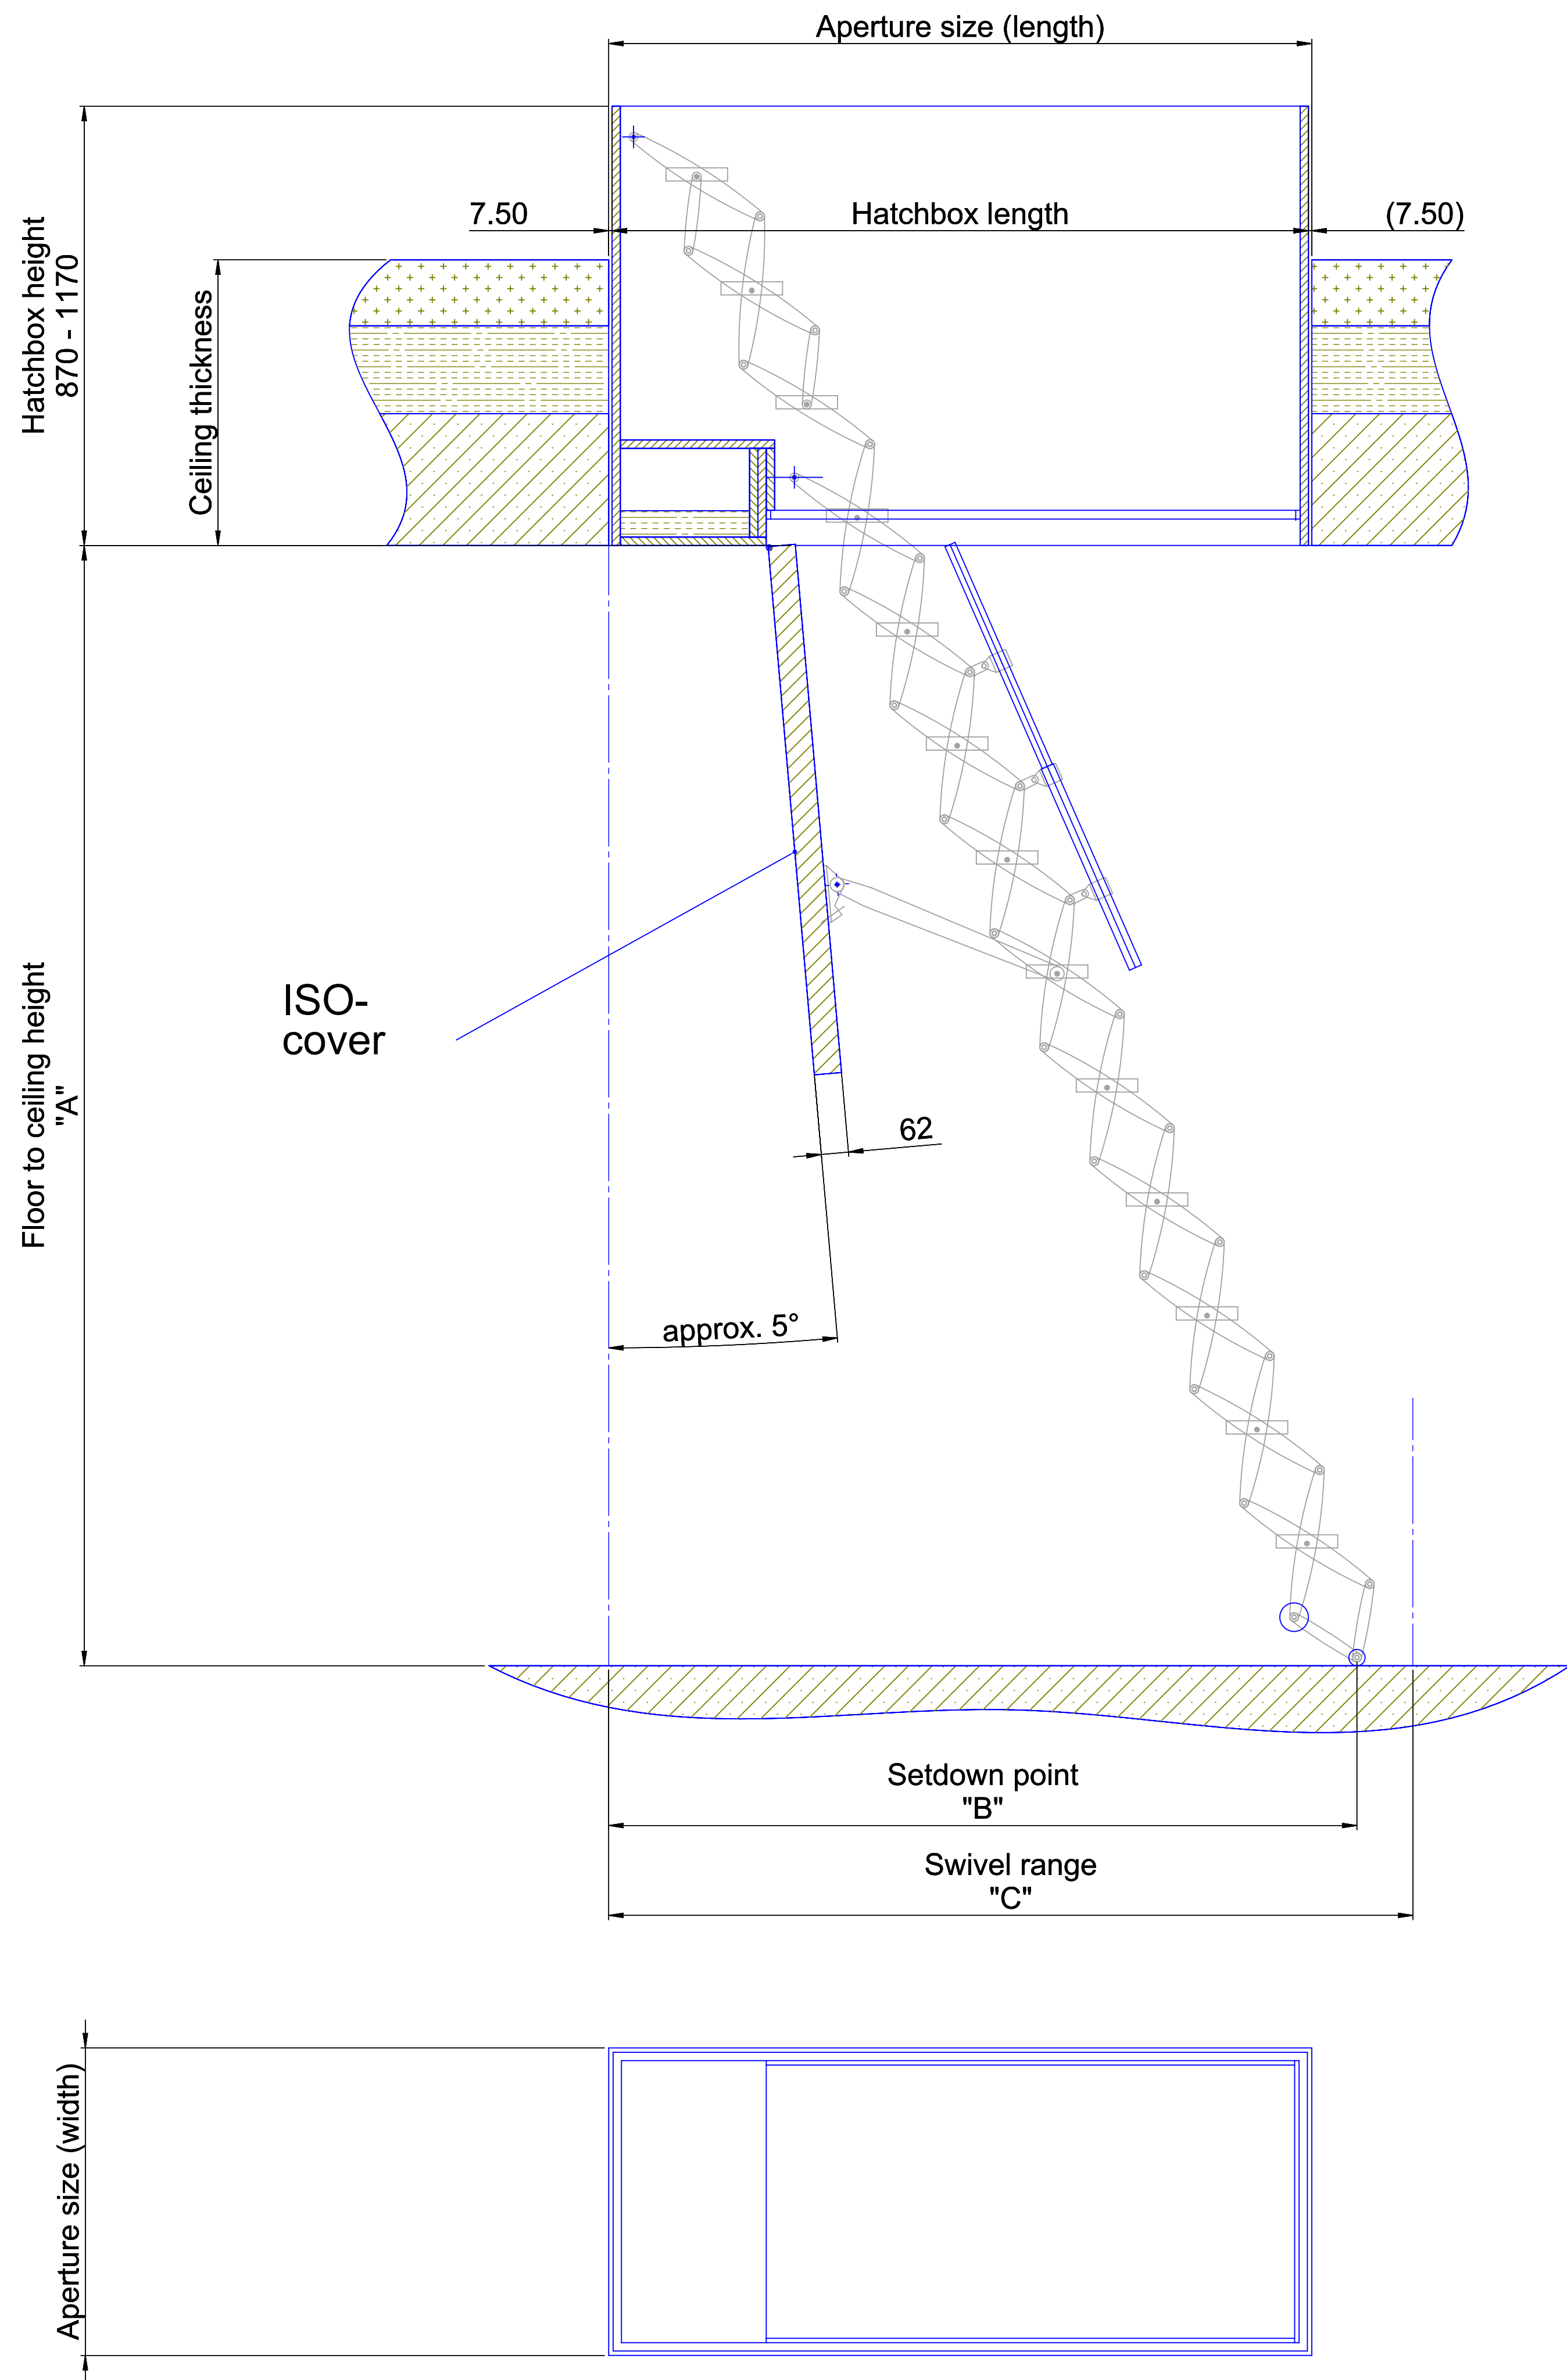

Supreme with wooden hatchbox, 3 additional treads

Ready to install element
Safety tested: tested according to DIN EN 14975 by TÜV Süd

Airtightness (a value): class 4 - According to DIN EN 12114, DIN EN 1026, DIN EN 12207 by ift Rosenheim

Thermal properties: U - Value = 0.58 W/m² K according to EN ISO 12567-1 by ift Rosenheim

Stairs:
Scissor unit: die-cast aluminium
Load bearing capacity per tread 200 kg or 500 kg / m² of the entire component
Tread depth 14 cm (16 cm)

Custom sizes:
Custom sizes are available on request

Aperture length depends on the number of treads		Space required in cm		
Treads	Aperture size (length)	Floor to ceiling height "A"	Setdown point "B"	Swivel range "C"
9	127.5 - 197	220 - 250	161 - 149	170
10	127.5 - 197	250 - 279	172 - 159	181
11	137.5 - 197	279 - 309	182 - 168	193
12	137.5 - 197	309 - 339	193 - 178	205
13	167.5 - 197	339 - 369	220 - 207	232
14	177.5 - 197	369 - 399	232 - 218	245
15	187.5 - 197	399 - 430	243 - 228	259
Hatchbox external dimensions = aperture size -1.5cm				

Standard sizes	
Aperture size length x width	Tread width
120 x 60 cm	25 cm
120 x 70 cm	35 cm
130 x 70 cm	35 cm
140 x 70 cm	35 cm



PREMIER LOFT LADDERS
2 Dawson Drive,
Trimley St Mary,
Felixstowe, Suffolk. IP11 0YW

Tel: 0845 9000 195
Fax: 01394 214413
www.premierloftladders.co.uk

© All rights reserved. Report all discrepancies. Do not scale drawings.

Other sizes and different ceiling heights are available on request

6000224

Supreme with wooden hatchbox, 3 additional treads

The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.

Scale 1:10