

ProfiLine EI₂30, F30 Plus, EI₂60

Ready to install element

Safety tested: Tested according to DIN EN 14975 by TÜV Süd

Airtightness (a value): class 4 - 600pa pressure tested to DIN EN 12207 / 12144 by IFT Rosenheim

Thermal properties: U-Value lower cover = 0.92 W/m²K
Certified according to EN ISO 12567-1 by IFT Rosenheim


Fire Rating: EI₂30 = 30 minutes protection from below. EI₂60 = 60 minutes protection from below. Tested according to EN1363, EN1364 and ONORM B3860 by IBS Linz. Installation in wood-beamed ceiling or in concrete ceilings. F30 Plus = 30 minutes protection from below and above. Certified to DIN4102-2 by MPA Braunschweig. Installation in concrete ceilings (≥150mm).

Stairs:

Wooden ladder: 3-part folding
Load bearing capacity per tread: 150kg or 350kg/m² of the entire component.
Tread dimensions: 33cm x 8cm

Custom sizes:

Custom sizes are available on request

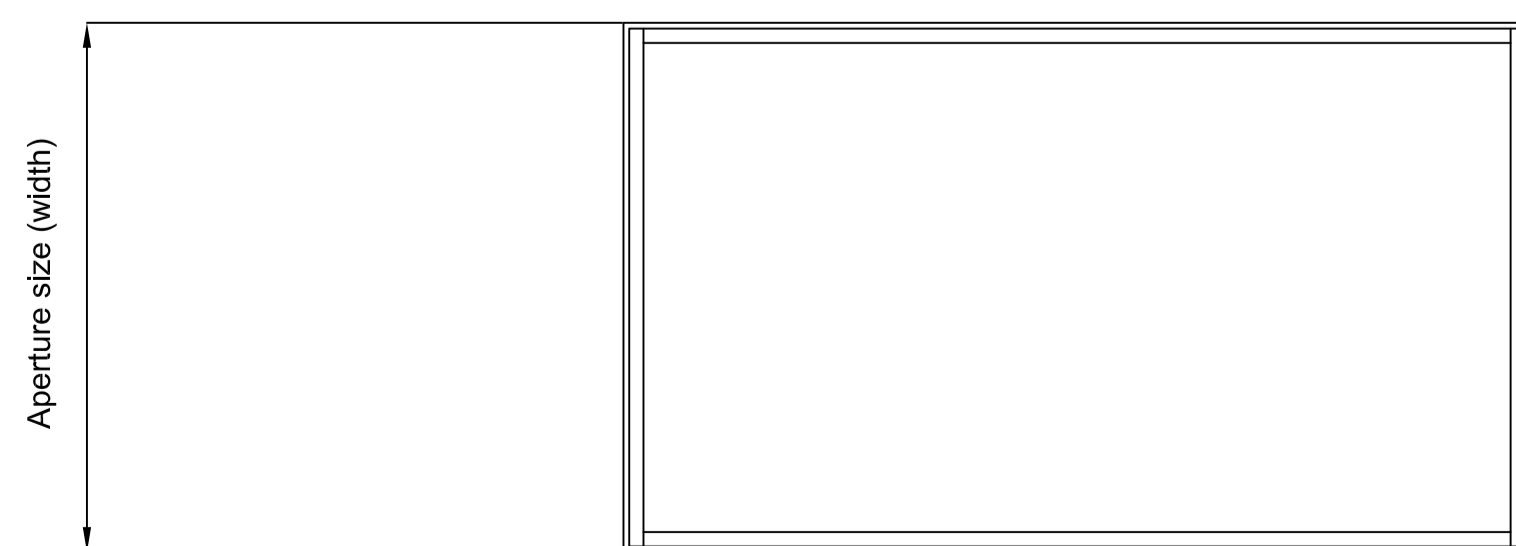

Space required in cm			
Aperture size (length)	Floor to ceiling height "A"	Setdown point "B"	Swivel range "C"
120 - 140	Up to 288	88-104 α = 15°	160
		108-129 α = 20°	168
140 - 150	Up to 356	107-124 α = 15°	200
		132-155 α = 20°	210

Hatchbox external dimensions = aperture size - 1.5cm

Standard sizes		
Aperture size length x width	Floor to ceiling height "A"	Hatchbox height
120 x 60 cm	234 - 276	22 cm
120 x 70 cm	234 - 276	22 cm
130 x 70 cm	234 - 276	22 cm
140 x 70 cm	234 - 276	22 cm

PREMIER
LOFT=LADDERS

PREMIER LOFT LADDERS
2 Dawson Drive,
Trimley St Mary,
Felixstowe, Suffolk. IP11 0YW
Tel: 0345 9000 195
Fax: 01394 214413
www.premierloftladders.co.uk



© All rights reserved. Report all discrepancies. Do not scale drawings.

First Issue	Date	Name	Scale
A	27.10.2019	JP	1:10
A	08.03.2024	JP	AT A1

Other sizes and different ceiling heights are available on request

6000463

ProfiLine EI₂30, F30 Plus, EI₂60

The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.