


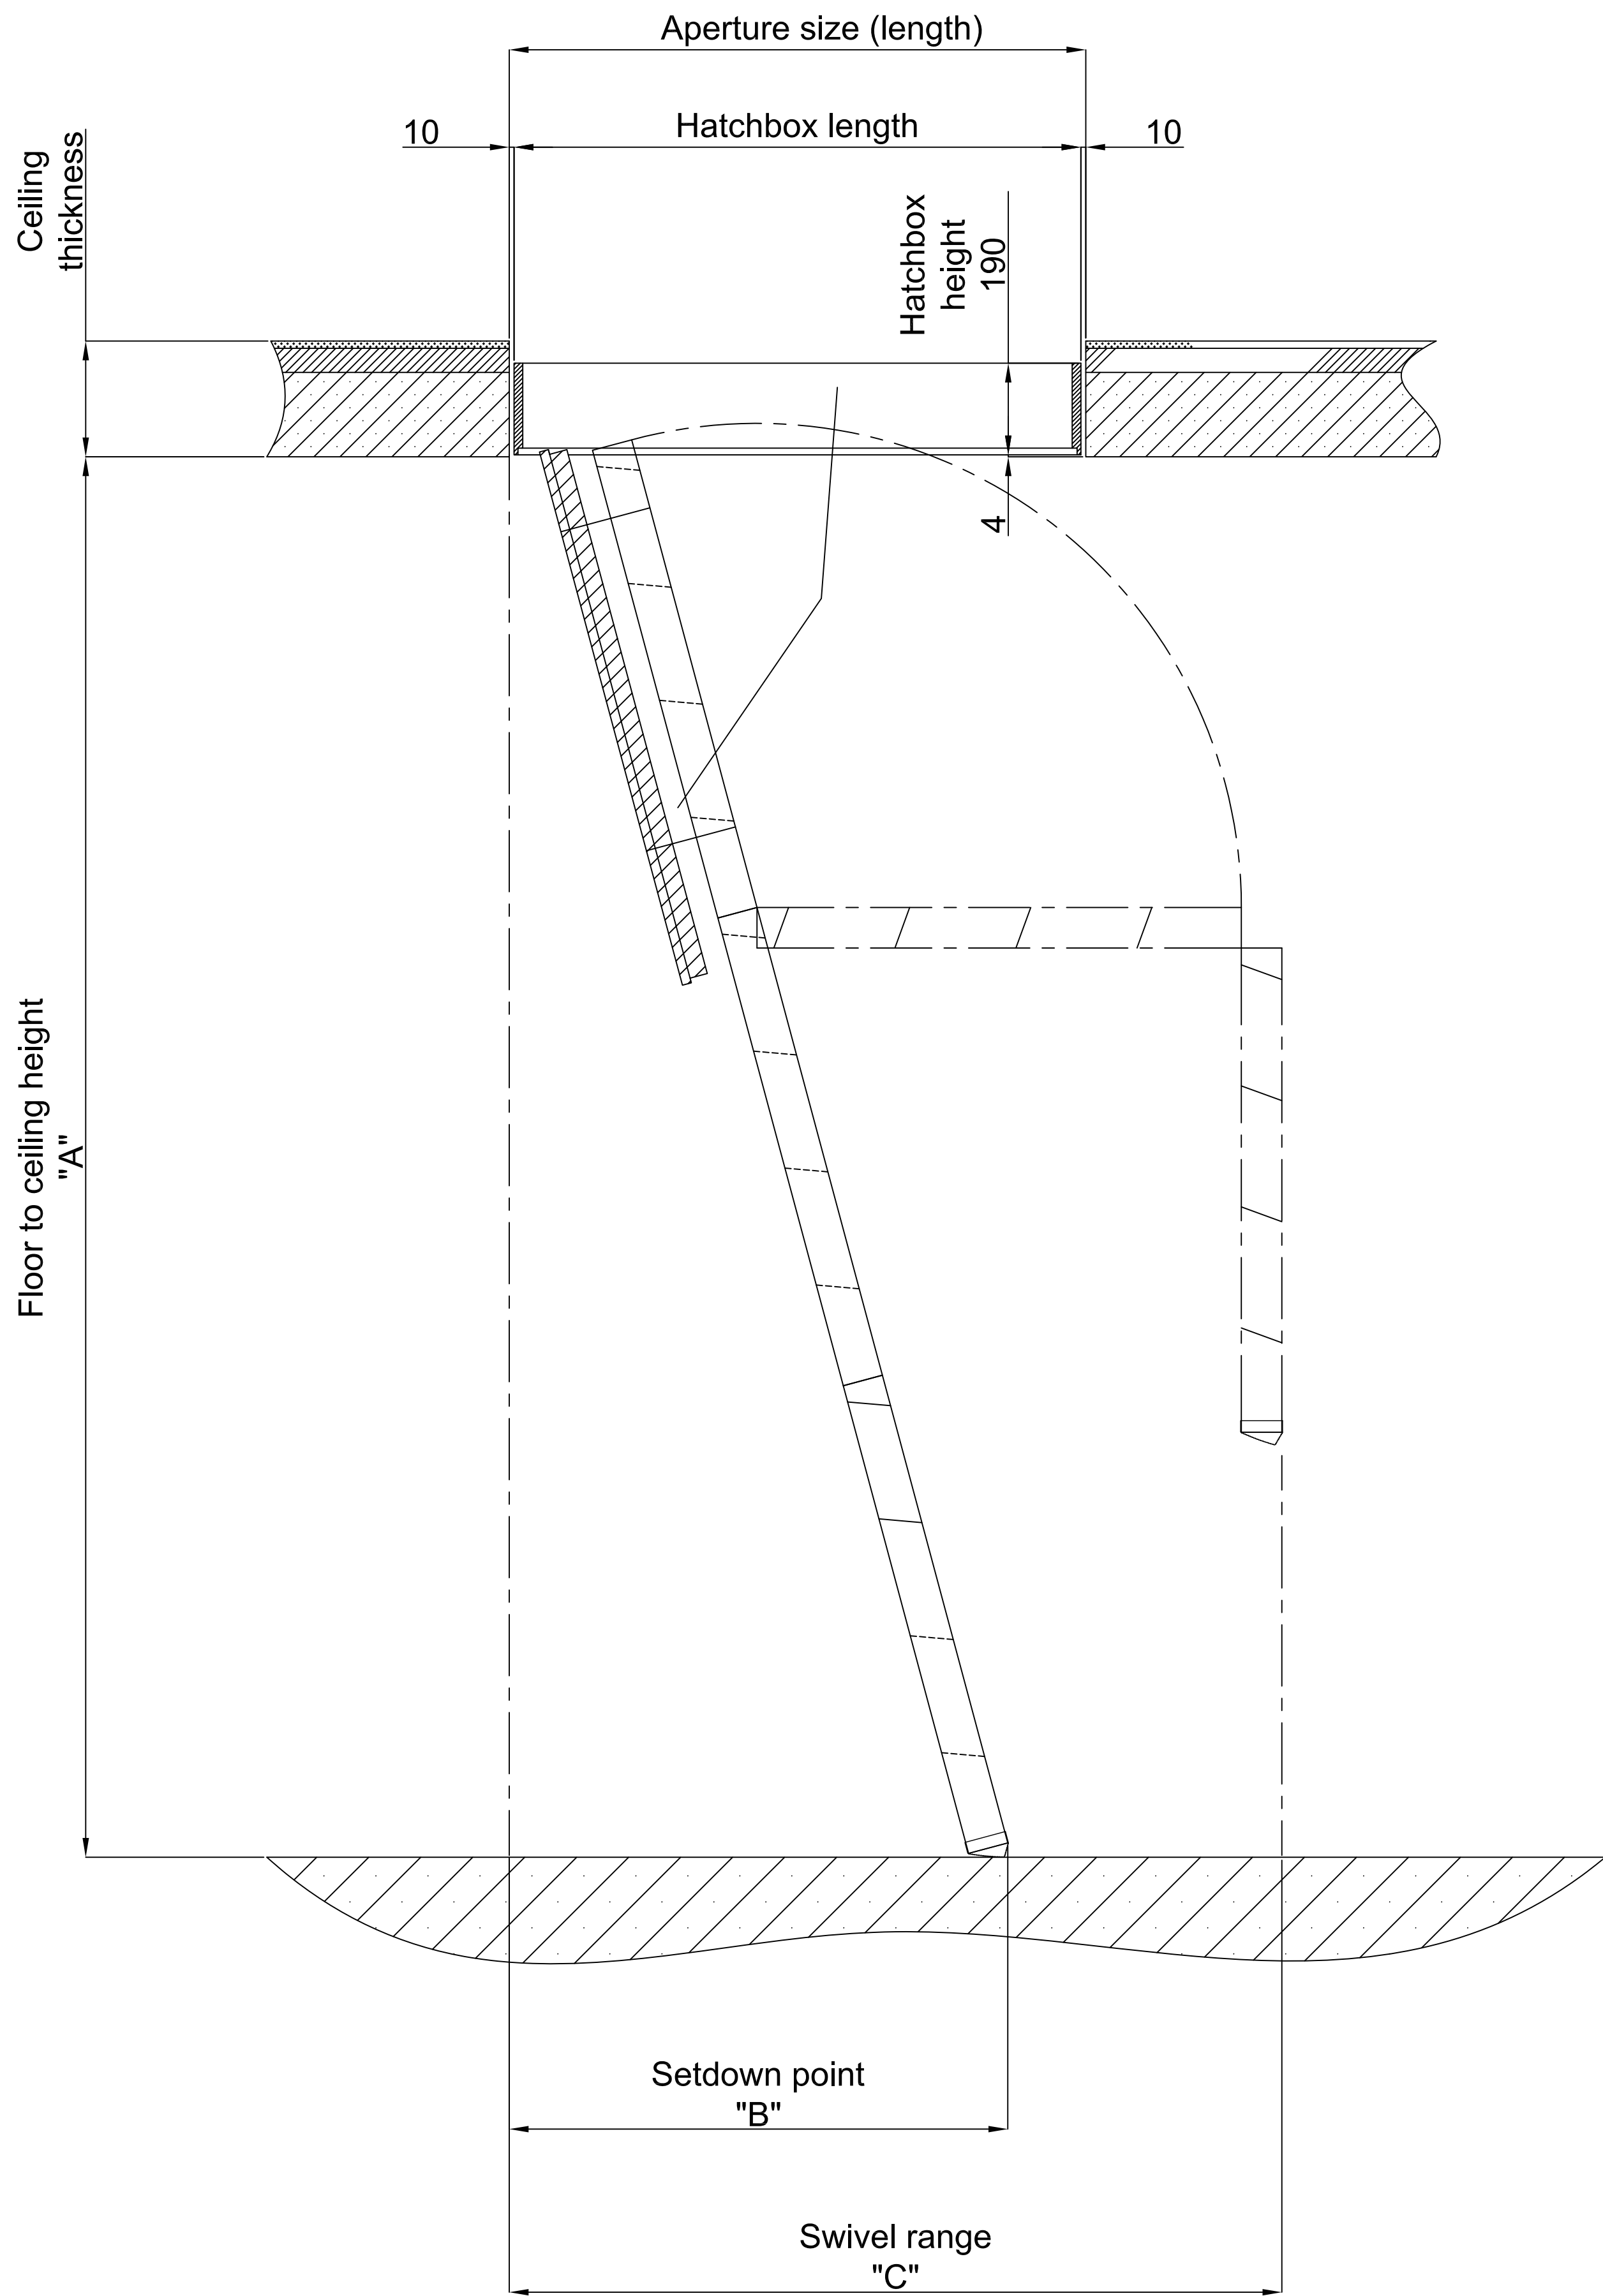

Cadet 3 Wooden Loft Ladder

Ready to install element

Safety tested:
Tested according to DIN EN 14975 by TÜV Süd

Airtightness (a value):
Class 4 - 600pa pressure tested to DIN EN 12207 / 12114 by IFT Rosenheim

Thermal properties:
U-Value lower cover = 0.90 W/m²K. Certified according to DIN ISO 12567-1 by IFT Rosenheim

Stairs:
Wooden ladder: 3-part folding
Load bearing capacity per tread: 150kg
Tread dimensions: 36cm x 8cm

Space required in cm			
Aperture size (length x width)	Floor to ceiling height "A"	Setdown point "B"	Swivel range "C"
112 x 60	225 - 265	88 - 120	168
112 x 70	225 - 265	88 - 120	168
120 x 60	225 - 288	88 - 128	168
120 x 70	225 - 288	88 - 128	168
130 x 70	225 - 288	88 - 128	168
140 x 70	225 - 288	88 - 128	168
Hatchbox external dimensions = aperture size - 2 cm			



PREMIER LOFT LADDERS

2 Dawson Drive,
Trimley St Mary,
Felixstowe, Suffolk. IP11 0YW

Tel: 0345 9000 195

Fax: 01394 214413

www.premierloftladders.co.uk



© All rights reserved

Report all discrepancies

FIRST
ISSUE

Date

Name

18.06.2020

JP

Other sizes and
different ceiling
heights are
available on
request

6000500

Cadet 3

1:10

The data on the drawings is for information only.
All dimensions must be checked on site.
No responsibility is taken for errors.