
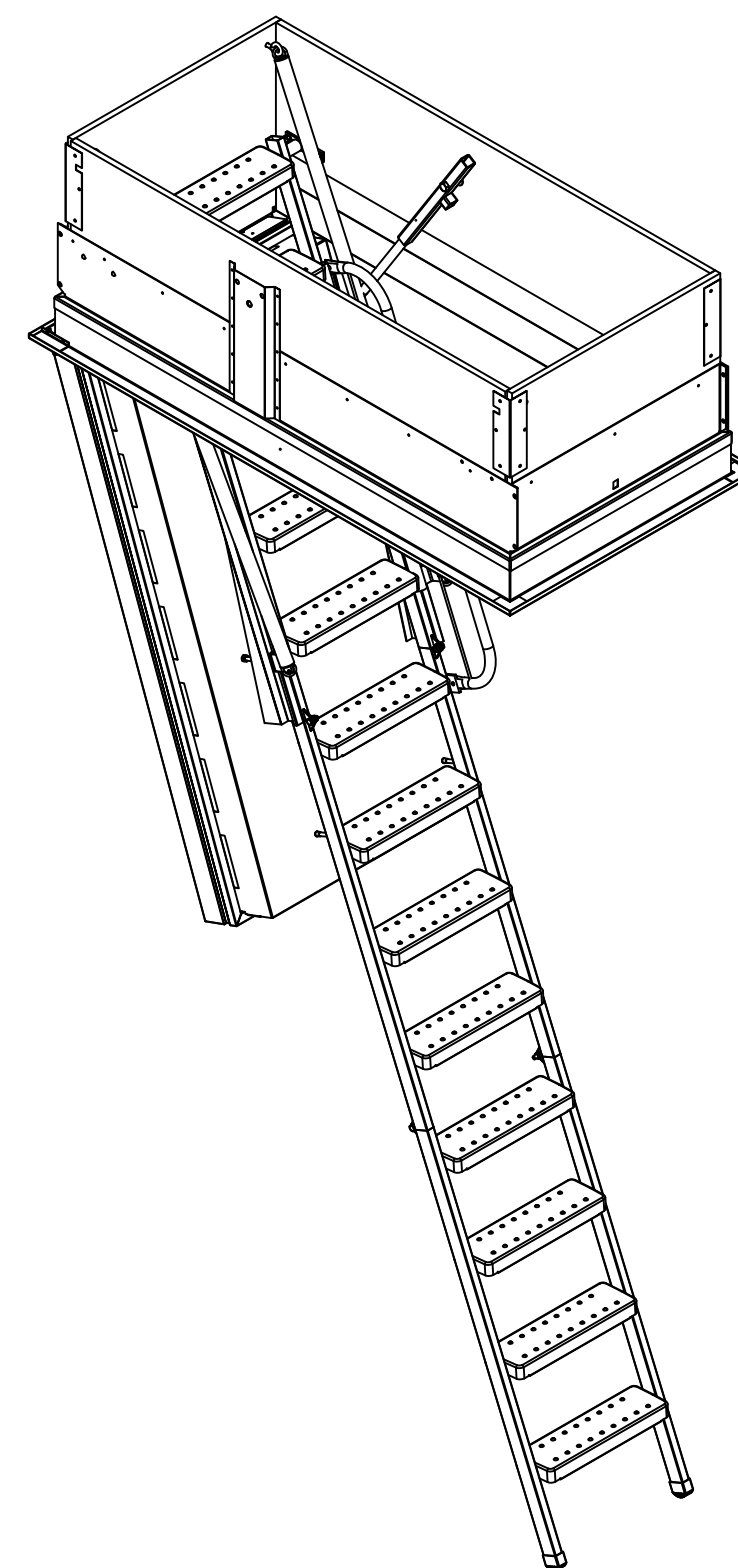
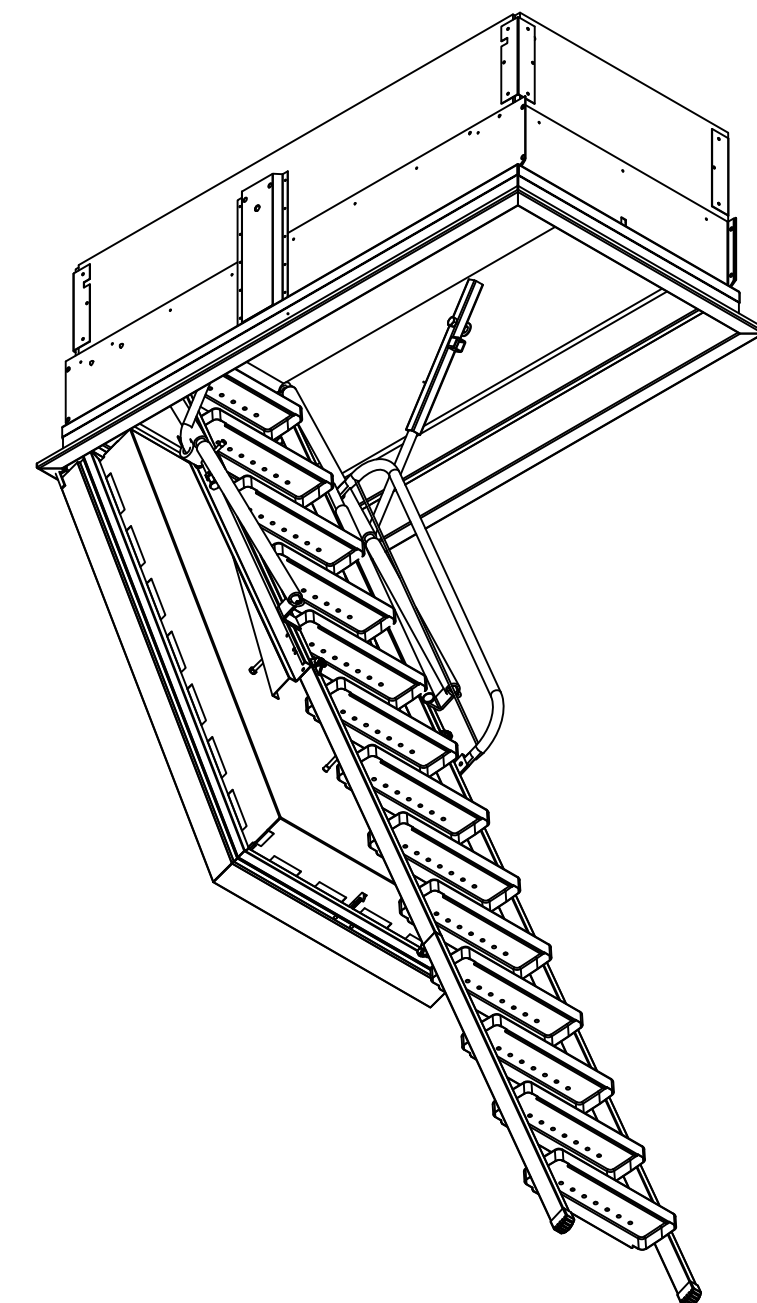
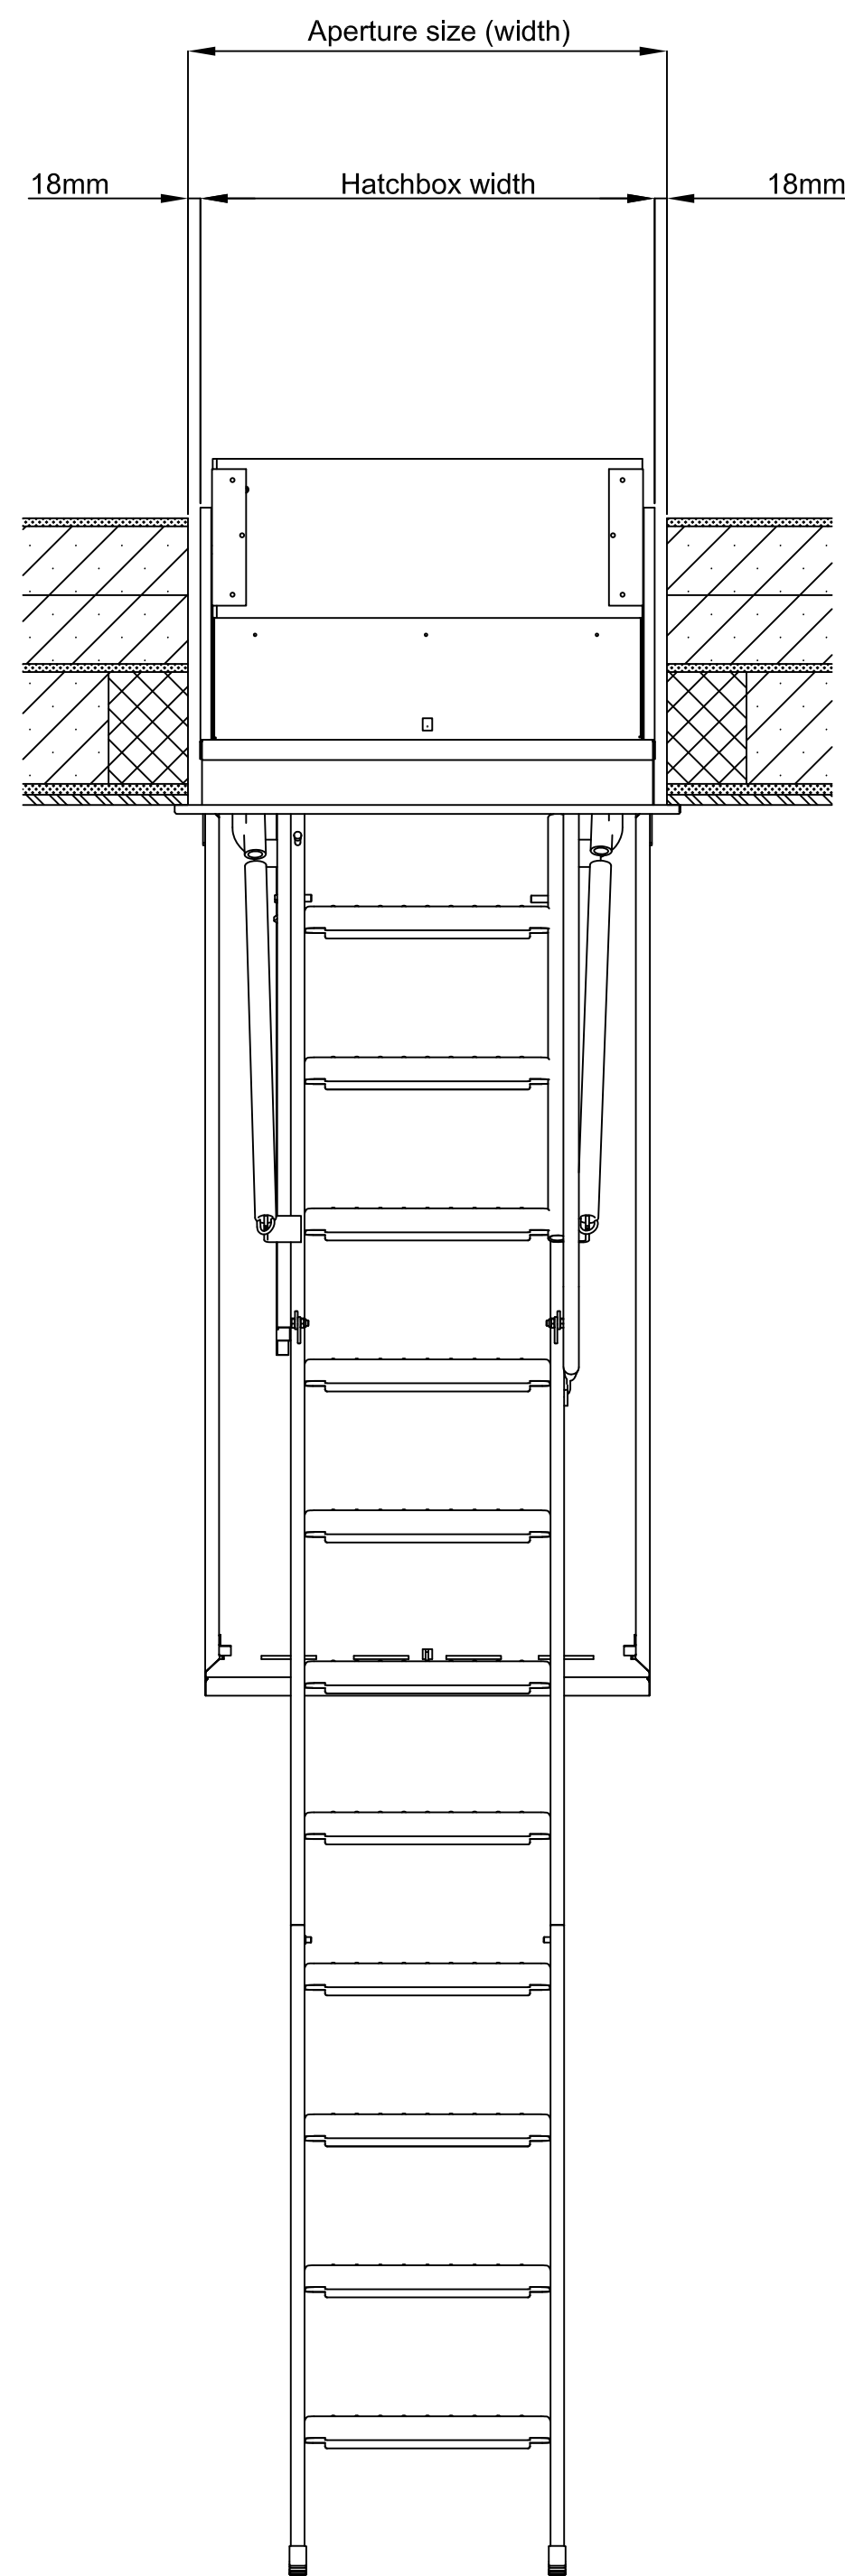


NOTE: ALL INFORMATION CONTAINED IN THIS DOCUMENT IS STRICTLY CONFIDENTIAL.  
THIS DRAWING IS THE PROPERTY OF PREMIER LOFT LADDERS AND MUST NOT BE REPRODUCED WITHOUT PRIOR PERMISSION.

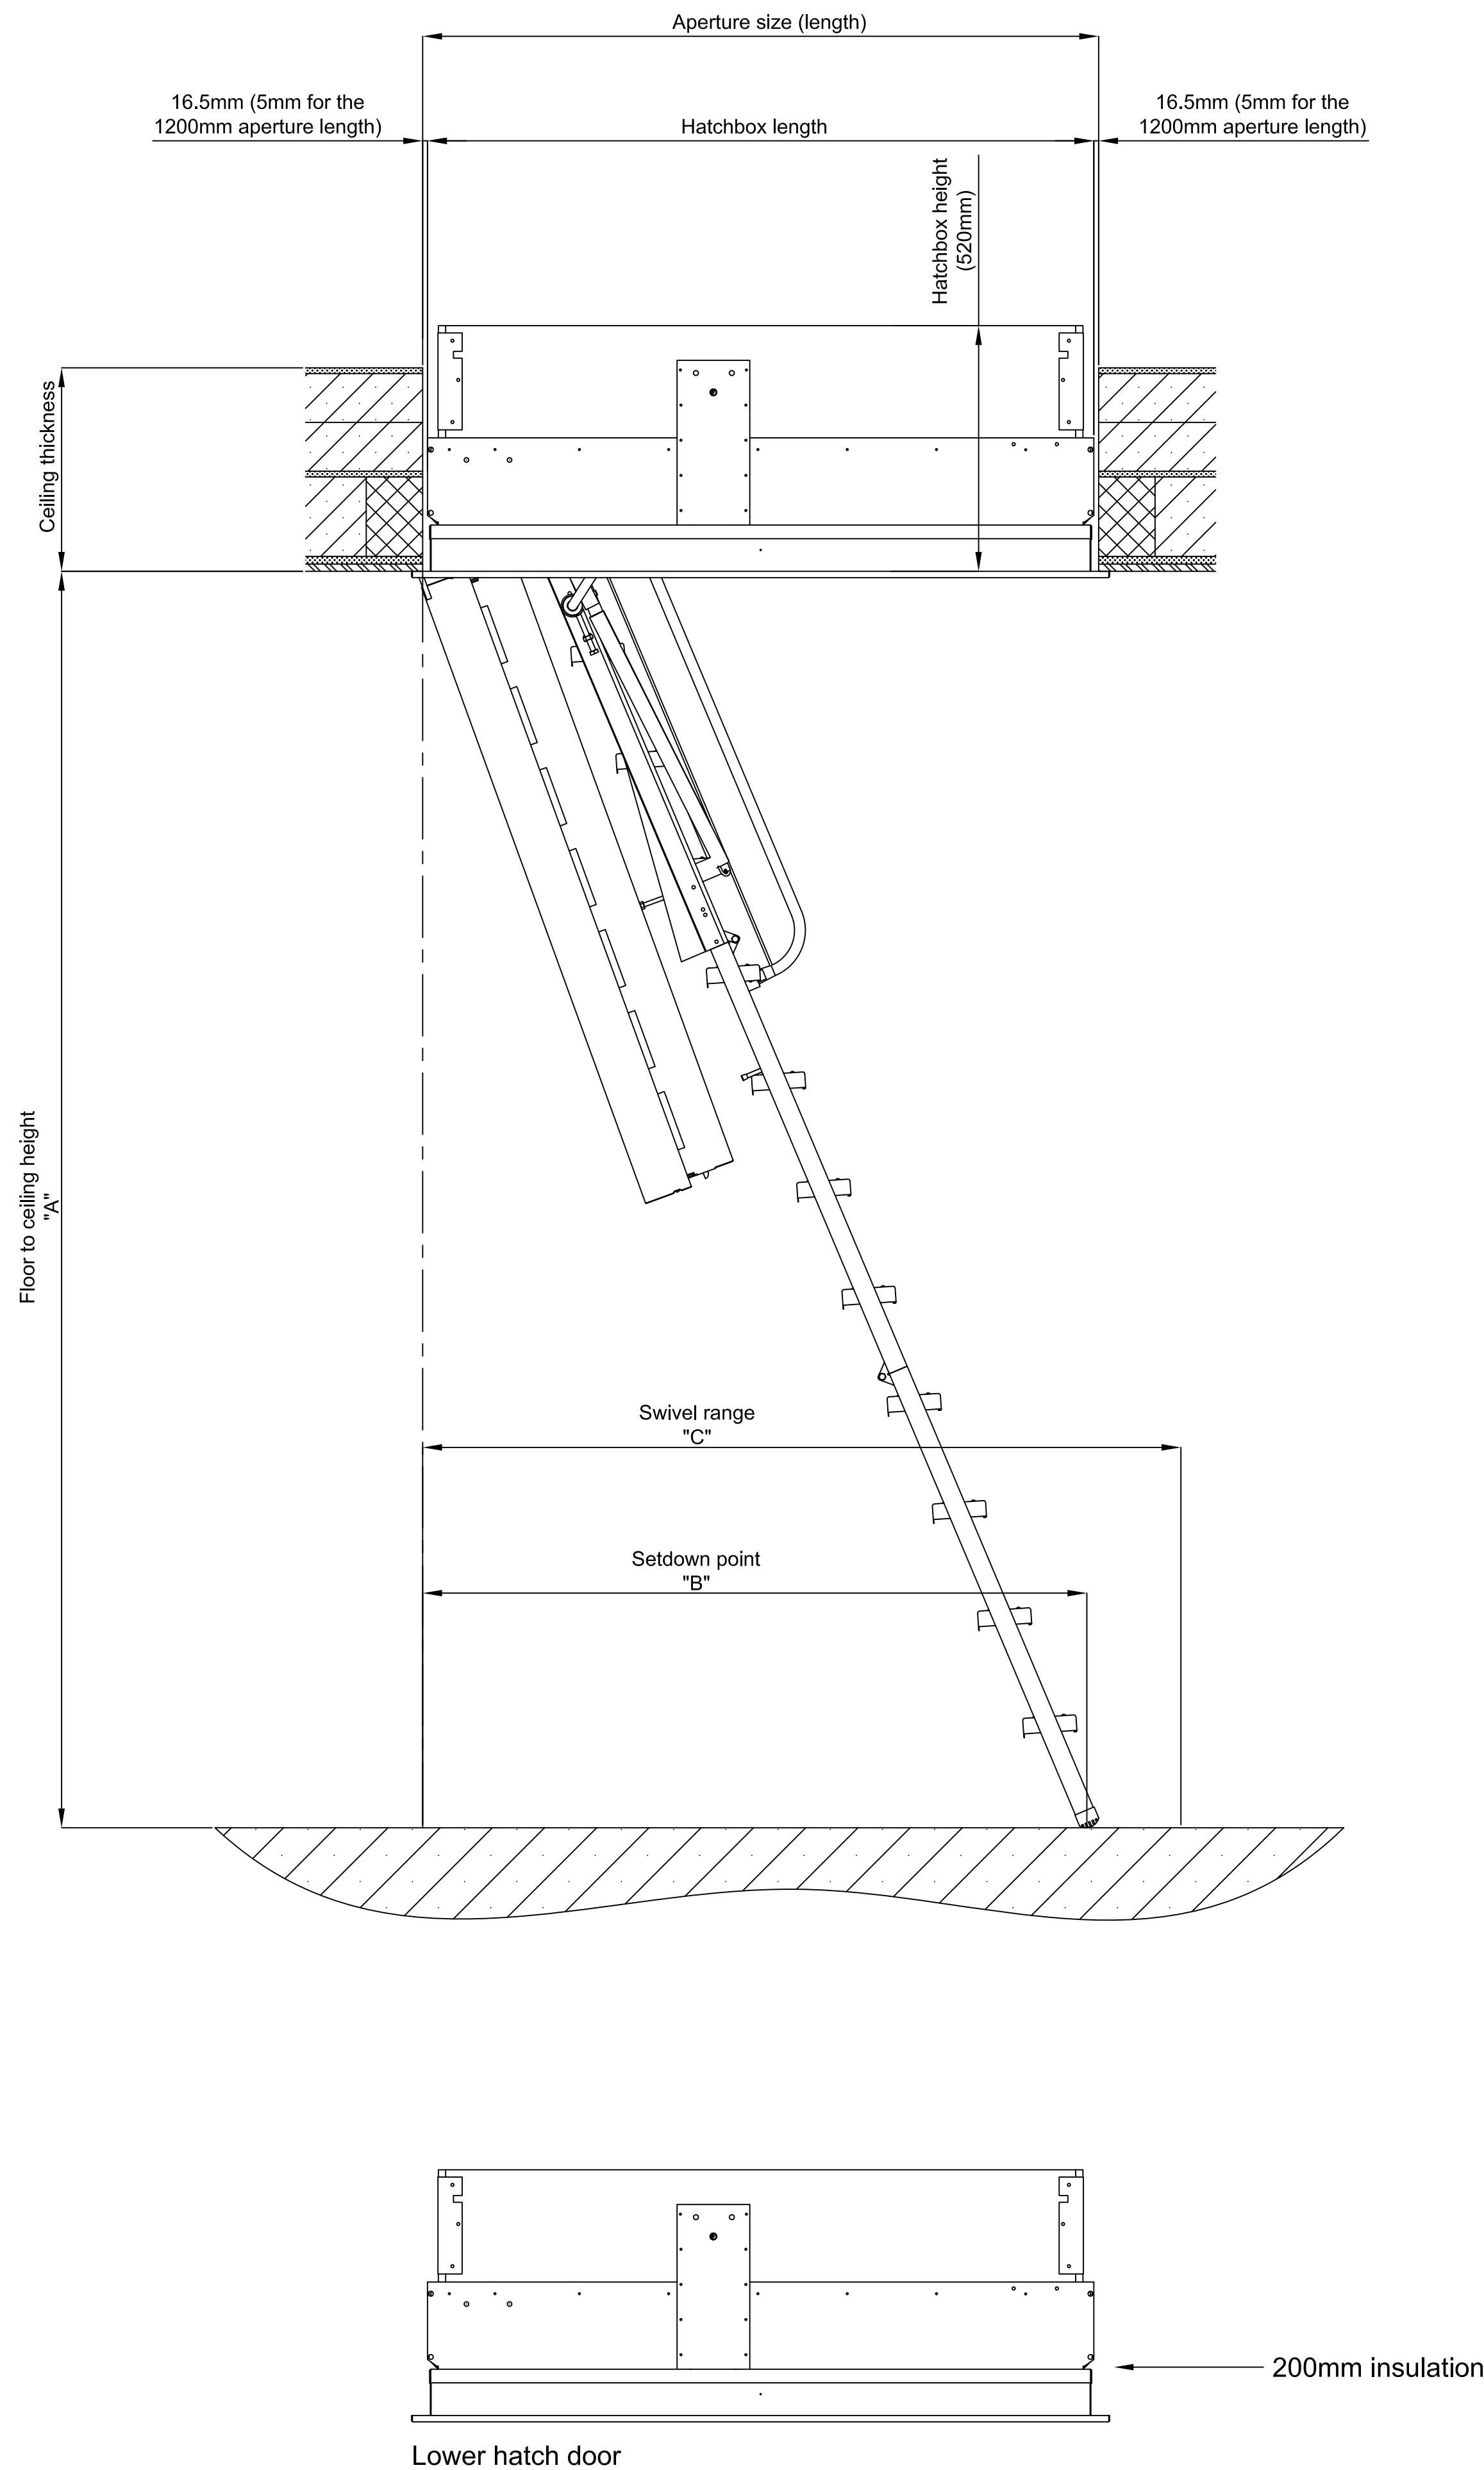

## Isotec 200

### Ready to install element

**Airtightness (a value):** class 4 - certified to DIN EN 12114 by the IFT Rosenheim

**Thermal properties:** U-Value lower cover = 0.17 W/m<sup>2</sup>K (or 0.13 W/m<sup>2</sup>K with optional secondary upper hatch). Calculated by TU Graz No. B12.137.002.484

**Fire Rating:** EI<sub>2</sub>60 tested according to ÖNORM 3860, EN 1634-1, EN 1363-1.

### Stairs:

Steel ladder: 3-part or 4-part folding

Load bearing capacity: 250kg

Tread depth: 120mm

Tread width: 250mm or 360mm, subject to aperture width

### Custom sizes:

Custom sizes are available on request

Aperture length: 1200mm - 1600mm

Aperture width: 500mm - 900mm

Floor to ceiling height: Up to max. 3400mm

Fire protection certified for a maximum aperture of 1500mm long x 800mm wide.

Standard Sizes				
Aperture size (length x width)	Floor to ceiling height "A"	Hatch box height	Setdown point approx.* "B"	Swivel range "C"
1200 x 700	2500 -2650	520	1230 (2650)	1410 - 1283
1300 x 700	2500 - 2600	520	1350 (2600)	1610 - 1710
1400 x 700	2500 - 2700	520	1090 (2700)	1590 - 1760
*Setdown point varies, depending on floor to ceiling height. Floor to ceiling height shown in brackets				

	PREMIER LOFT LADDERS 2 Dawson Drive, Trimley St Mary, Felixstowe, Suffolk. IP11 0YW			Tel: 0345 9000 195 Fax: 01394 214413 www.premierloftladders.co.uk	
	© All rights reserved			Report all discrepancies	
	Other sizes and different ceiling heights are available on request			Isotec 200	
	7000302			The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.	