


# Customer requirements

Specification sheet:

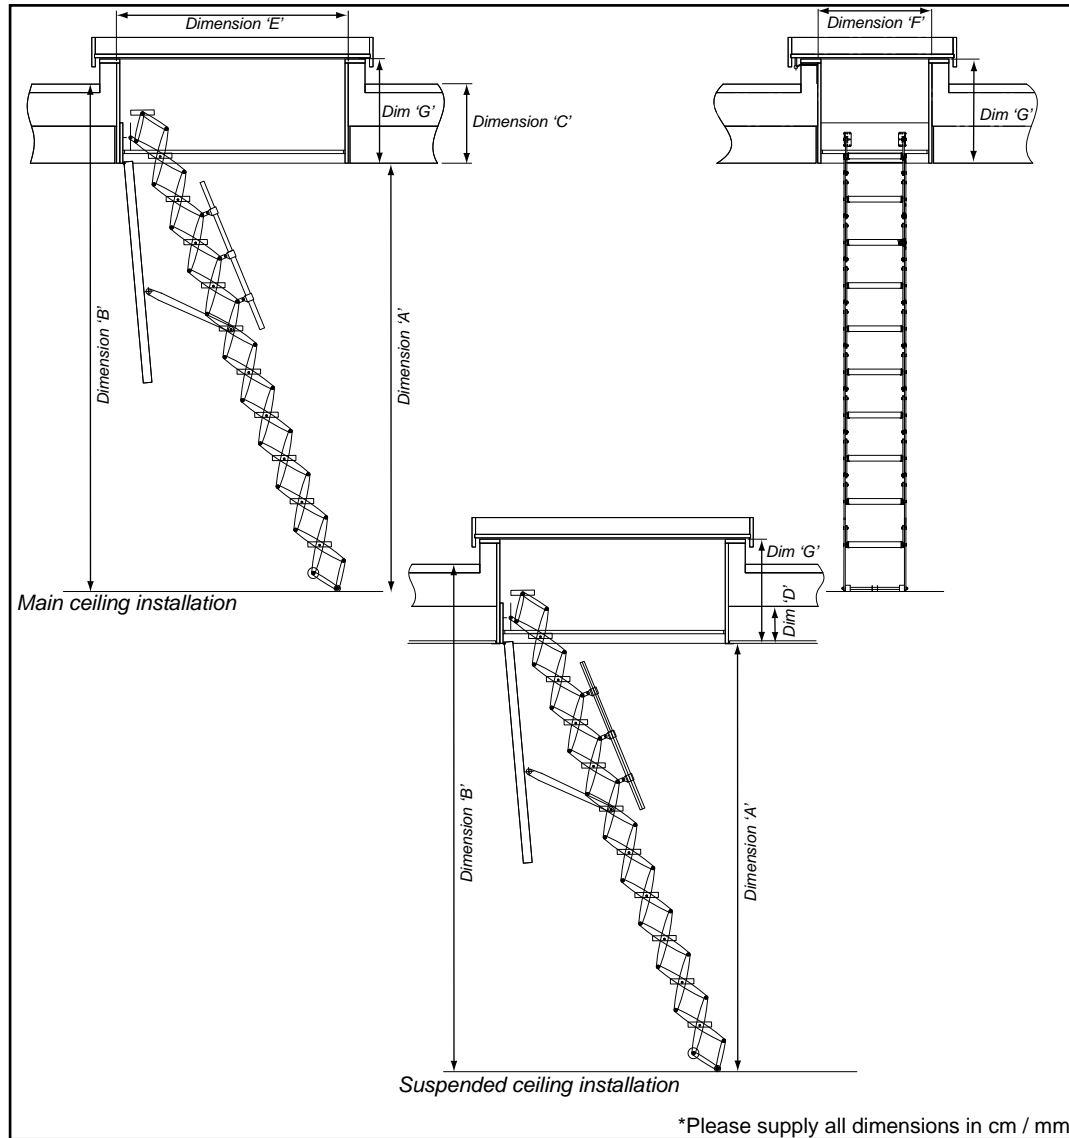

# Supreme Stairway:

with a wooden hatchbox and trapdoor plus weatherproof roof hatch cover

Ready to fit unit comprising of a counter balance sprung aluminium alloy stairway manufactured from high strength die-cast aluminium alloy components contained within and attached to a trapdoor and 19mm thick plywood hatchbox together with an insulated weatherproof roof hatch. The trapdoor has a U-value of 0.8 W/m<sup>2</sup>K and is Class 4 airtight tested. The roof hatch has an all round rubber seal and is clad with zinc coated 1.5mm sheet steel. Roof hatch top cover = U-value 0.68 W/m<sup>2</sup> K, giving a combined U-value of 0.43W/m<sup>2</sup>K. The manually operated weatherproof and fungicide treated, insulated roof hatch is hinged on one of the long sides.

Our hatchbox lining will protrude 150mm above the roof upstand shown in dimension 'G' or 150mm above the roof make-up, if there is no kerb or upstand.

Please see our website or request a brochure for full product details.

Customer name:		
Contact number:		
Project title:		
Date:		
Dimension 'A': Floor to ceiling		
Dimension 'B': Finished floor to finished roof level		
Dimension 'C': Thickness of ceiling		
Dimension 'D': Underside of suspended ceiling to underside of slab/joist		
Dimension 'E': Length of aperture		
Dimension 'F': Width of aperture		
Dimension 'G': Underside of ceiling to top of roof upstand		
Model Required:		
Options Required:		
<input type="checkbox"/> Cylinder lock	<input type="checkbox"/> Steel hatchbox and trapdoor F30	<input type="checkbox"/> Handrail on <input type="checkbox"/> left or <input type="checkbox"/> right
<input type="checkbox"/> Remote control	<input type="checkbox"/> Steel hatchbox and trapdoor F90	<input type="checkbox"/> 3 part folding ladder
<input type="checkbox"/> Dehumidifier	<input type="checkbox"/> Electrical operation - stairway	<input type="checkbox"/> Heated upper cover
<input type="checkbox"/> Powder coating	<input type="checkbox"/> Electrical operation - upper cover	<input type="checkbox"/> Smoke warning
<input type="checkbox"/> Roof level guardrail		<input type="checkbox"/> Cladding material
<i>Please tick options required</i>		



2 DAWSON DRIVE  
TRIMLEY St. MARY  
FELIXSTOWE  
SUFFOLK. IP11 OYW

TEL No.: 0845 9000 195  
WWW.PREMIERLOFTLADDERS.CO.UK  
SALES@PREMIERLOFTLADDERS.CO.UK

Please forward a quotation to .....@..... based on the information detailed above.

Signed:.....

Position:.....