
## Customer requirements

Specification sheet:

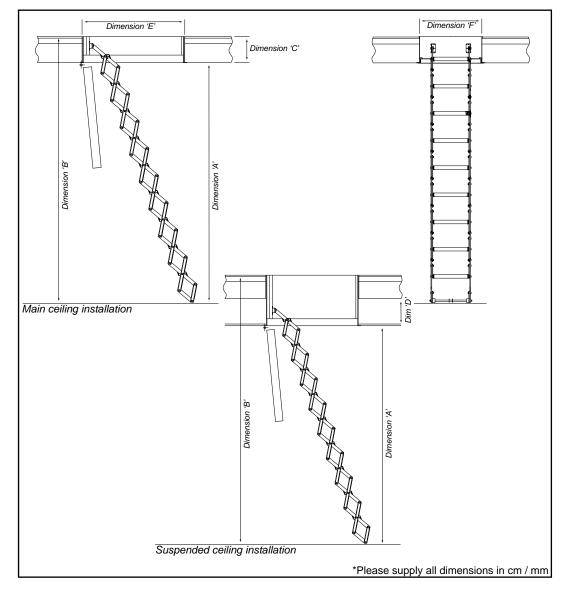

## Supreme Stairway:

with wooden hatchbox and trapdoor

## Supreme stairway with a wooden hatchbox and insulated trapdoor

U-value 0.58 W/m<sup>2</sup> K, with Class 4 certified airtight seal. Ready to fit unit, comprising of a stairway manufactured from high strength die-cast aluminium alloy components contained within, and attached to, a laminated wood hatchbox and 62mm thick sandwich construction insulated trapdoor. The trapdoor has a white finish to the underside. Manufactured to EN14975 (DIN 4570) with a load bearing per tread of 200kg.

Please see our website or request a brochure for full product details.

Customer name:					
Contact number:					
Project title:					
Date:					
Dimension 'A': Floo					
Dimension 'B': Finished floor to finished floor					
Dimension 'C': Thickness of ceiling					
Dimension 'D': Underside of suspended ceiling to underside of main ceiling					
Dimension 'E': Length of aperture					
Dimension 'F': Widt					
Model Required:					
Options Required:	Top operation	Handrail on left or right	□ Handrail on left or right		
	Cylinder lock	🗆 3 side upper level gua	ardrail		
Please tick options required	Powder coating	Passivhaus version with upper hatch (please note 'C' is minimum 630mm)			



2 DAWSON DRIVE TRIMLEY St. MARY FELIXSTOWE SUFFOLK. IP11 OYW

TEL No.: 0845 9000 195 WWW.PREMIERLOFTLADDERS.CO.UK SALES@PREMIERLOFTLADDERS.CO.UK

Please forward a quotation to	@	based on the
Signed:		
Position:		