


View "X"

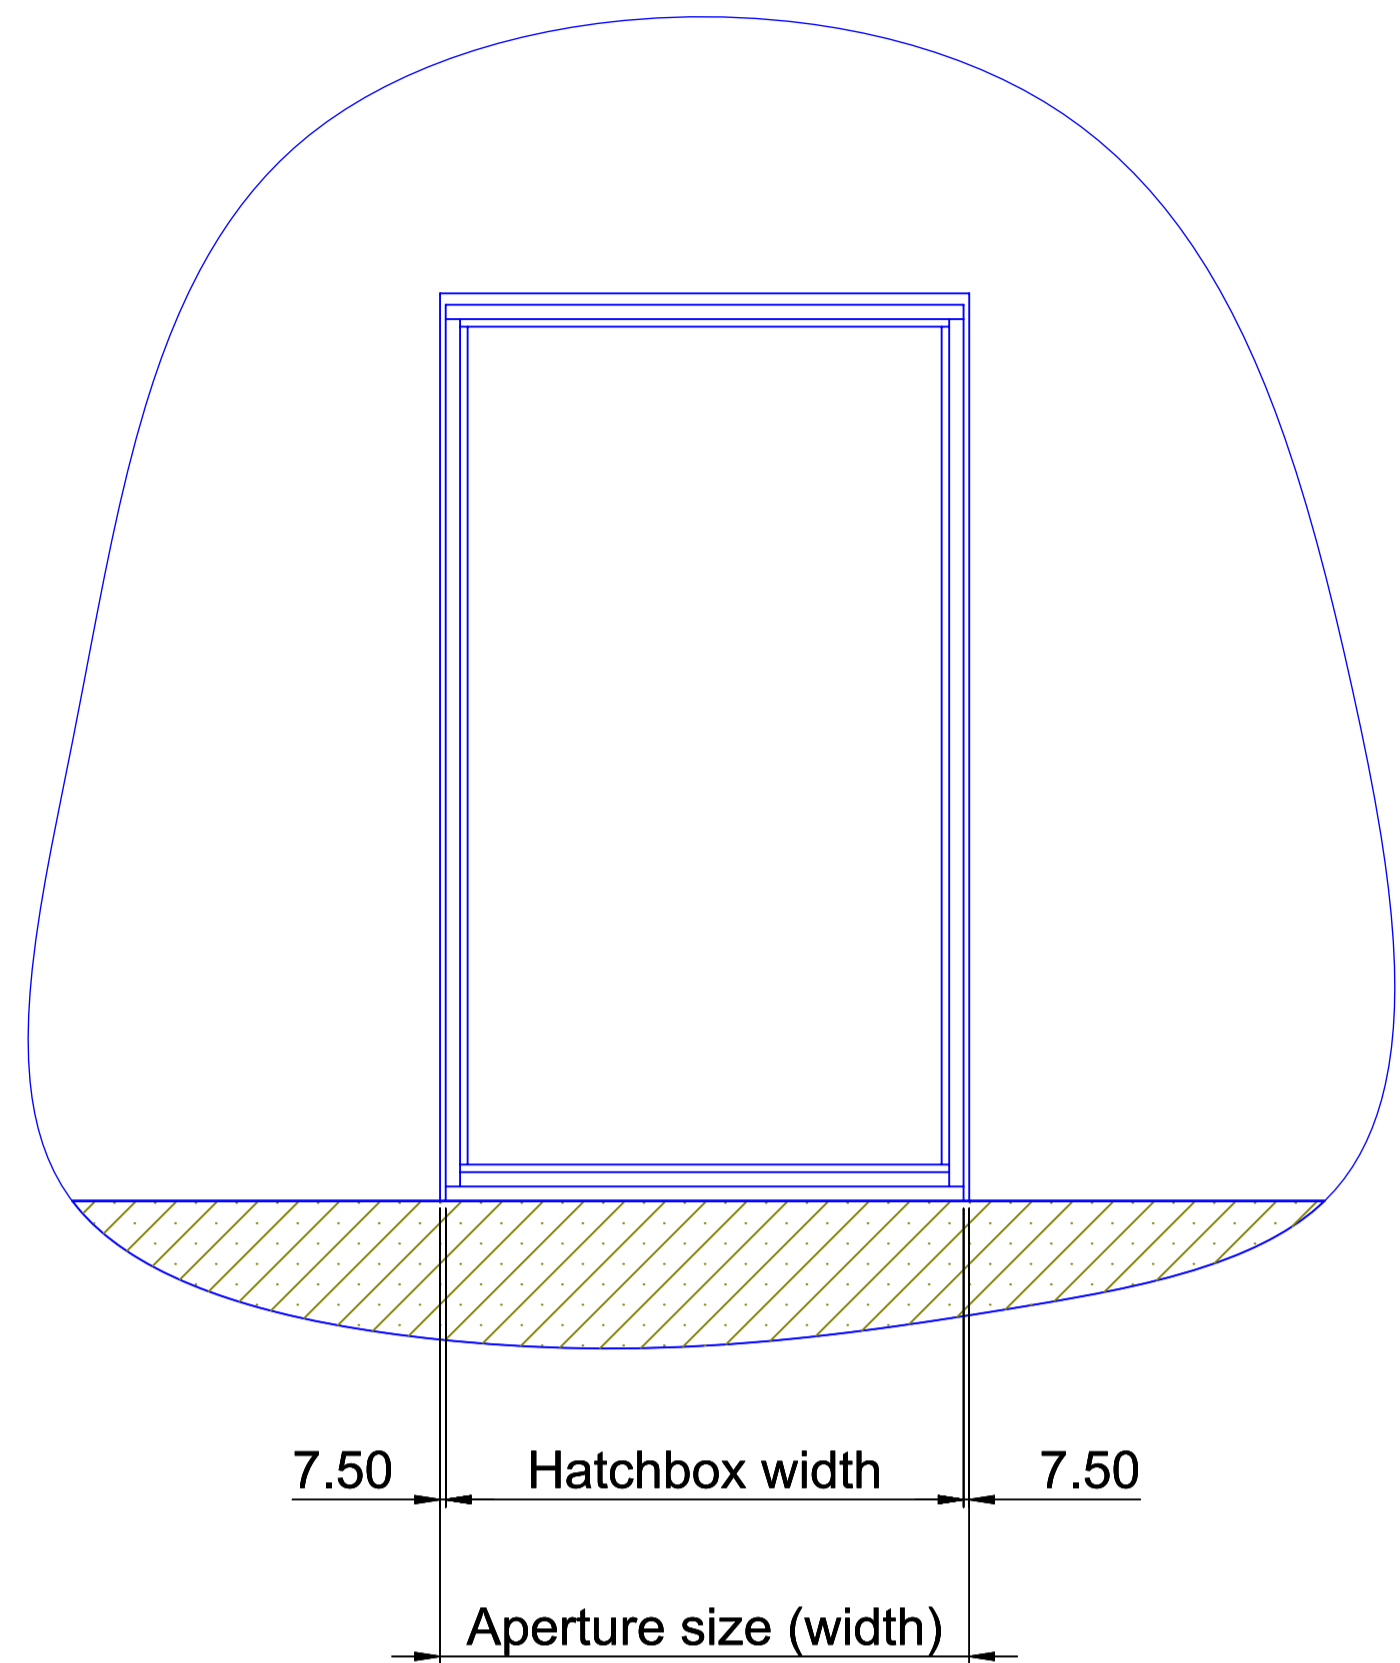

Supreme with wooden hatchbox -vertical access

Stairs:
 Scissor unit: die-cast aluminium
 Load bearing capacity per tread 200 kg or 500 kg / m² of the entire component

All stair units are made to measure

Aperture length depends on the number of treads		Space required in cm		
Treads	Aperture size (height)	Floor to ceiling height "A"	Touchdown point "B"	Swivel range "C"
9	80 - 140	220 - 250	119 - 102	133
10	85 - 140	250 - 279	127 - 109	144
11	95 - 140	279 - 309	135 - 124	155
12	105 - 140	309 - 339	142 - 129	166

Hatchbox external dimensions = aperture size -1.5cm

Minimum aperture sizes	
Aperture size height x width	Tread width
80 x 65 cm	25 cm
85 x 70 cm	30 cm
95 x 70 cm	30 cm
105 x 70 cm	30 cm



PREMIER LOFT LADDERS
 2 Dawson Drive,
 Trimley St Mary,
 Felixstowe, Suffolk. IP11 0YW
 Tel: 0845 9000 195
 Fax: 01394 214413
 www.premierloftladders.co.uk

© All rights reserved. Report all discrepancies. Do not scale drawings.

First Issue	Date	Name	Scale
A	31.07.2013	Ra	Supreme with wooden hatchbox - vertical access 1:10
B	14.09.2013	JP	
	10.08.2014	JP	

Other sizes and different ceiling heights are available on request

6000238

The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.

NOTE: ALL INFORMATION CONTAINED IN THIS DOCUMENT IS STRICTLY CONFIDENTIAL. THIS DRAWING IS THE PROPERTY OF PREMIER LOFT LADDERS AND MUST NOT BE REPRODUCED WITHOUT PRIOR PERMISSION.