

Cadet 3 wooden Loft Ladder...



...the traditional wooden loft ladder

The Cadet 3 wooden loft ladder combines traditional styling with quality components and clever design. It offers high-standards of thermal efficiency and is an ideal loft ladder for domestic/residential applications.



Key benefits at a glance

- Traditional wooden loft ladder design.
- Load capacity of 150kg per step.
- Good energy efficiency of 0.90 W/m²K.
- Wide steps with anti-slip profile for comfort and safety.
- Hatch box trap door finished in white on both sides.
- Available in standard sizes or made-to-order with a range of options and accessories.

Key features

Material:	Wood
Operation:	3-part folding
Load capacity:	150kg per step
U-value:	0.90 W/m ² K
Air permeability:	Class 4 certified
Max floor-to-ceiling height:	3.2m
Quality:	Compliant to EN 14975 (DN 4570)
Warranty:	2-year full warranty and 10-year parts warranty



*Cadet 3 wooden loft ladder
combines traditional styling with
high standards of thermal
insulation*

Overview

The Cadet 3 is a traditional wooden loft ladder that offers an attractive design. It is available in standard or made-to-measure sizes. The Cadet 3 is supplied as a ready to fit unit, consisting of a 3-part folding wooden ladder contained within, and attached to, a wooden hatch box and an insulated trapdoor.

Standard features

- 3 part folding wooden loft ladder with adjustable tilt
- Traditional wooden loft ladder design
- Load capacity of 150kg per step
- Supplied assembled in a hatch box with insulated trapdoor
 - Trapdoor supplied with a white finish to both sides
 - Standard hatch box height of 190mm, but can be specified for heights of up to 630mm
 - Snap-lock closure mechanism
- Energy efficient (U-value of 0.90 W/m²K, certified according to DIN ISO 12567-1 by IFT Rosenheim)
 - Reducing loss of heat and lowering energy costs
- Class 4 air permeability certified
- Available in standard hatch sizes for floor-to-ceiling heights between 2200mm and 2880mm
- Can be made-to-order to meet your exact dimensional requirements, for floor-to-ceiling heights of up to 3200mm (contact us for details)
- Wide steps / treads with anti-slip profile for comfort and safety
 - Step width of 360mm
 - Step depth of 80mm
- Supplied ready to install with a standard with a range of accessories

Accessories

- WDL insulation and sealing tape for an airtight connection between the loft ladder hatch box and the building
- Installation/assembly aid
- Protective railing for opening



WDL insulation and sealing tape for an airtight connection between hatch box and ceiling

Dimensions


The Cadet 3 is available in a range of standard dimensions:

Part number	A Floor-to-ceiling height (mm)	B Opening length (mm)	C Opening width (mm)	D Case height (mm)
CAD-2640-1120-600	2640	1120	600	190
CAD-2640-1120-700	2640	1120	700	190
CAD-2880-1200-600	2880	1200	600	190
CAD-2880-1200-700	2880	1200	700	190
CAD-2880-1300-600	2880	1300	600	190
CAD-2880-1300-700	2880	1300	700	190
CAD-2880-1400-600	2880	1400	600	190
CAD-2880-1400-700	2880	1400	700	190

* Distance subject to actual floor-to-ceiling height between 2640 to 2880m.

** This is the required minimum clearance in front of the ladder to extend/retract.

If you have specific dimensional requirements, the Cadet 3 is available made-to-measure for ceiling openings ranging between 1000mm to 1600mm long and 500mm to 900mm wide, and for floor-ceiling heights up to 3.2m. Please contact us for details and to arrange a quotation.

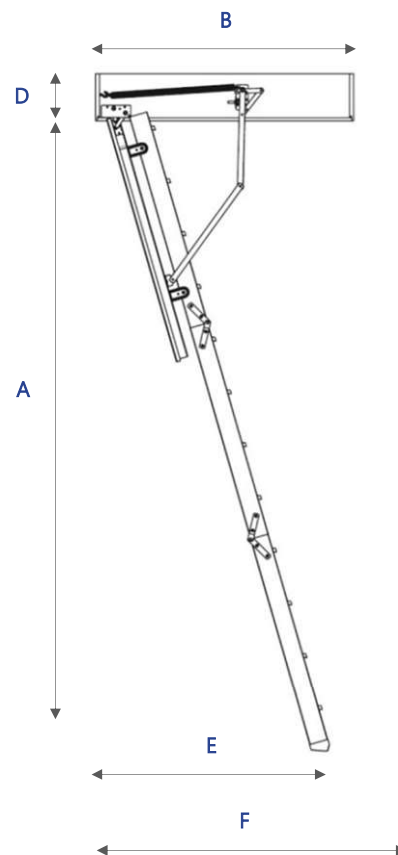

Quality

The Cadet 3 wooden loft ladder is manufactured to EN 14975 (DN 4570).

Supplied with a 2-year full warranty and 10-year parts warranty.

The
preferred
choice



Premier Loft Ladders Ltd

2 Dawson Drive, Trimley St Mary, Felixstowe Suffolk, UK

T: 01394 214413 or 0845 9000 195

F: 01394 214413

E: sales@premierloftladders.com

W: www.premierloftladders.com