

Elite with backboard

Ready to install element

Safety tested: Tested according to DIN En 14975 by TÜV Süd

Stairs:

Scissor unit: Aluminium

Load bearing capacity per tread: 200kg or 500kg/m² of the entire component.

Tread depth: 14cm (16cm)

Standard sizes:


Available as standard with a tread width of 350mm, suitable for a minimum aperture width of 580mm.

Custom sizes:

Custom sizes are available on request. Please refer to custom width table below

Aperture length depends on the number of treads		Space required in cm	
Treads	Aperture size (length) min. cm	Floor to ceiling height "A"	Setdown point with $\alpha = 20^\circ$ "B"
9	62	220 - 250	105 - 113
10	67	250 - 279	116 - 124
11	75	279 - 309	126 - 134
12	82	309 - 339	137 - 145

Custom widths	
Aperture size (width) min. cm	Tread width
43	20
48	25
53	30
58	35
61	38

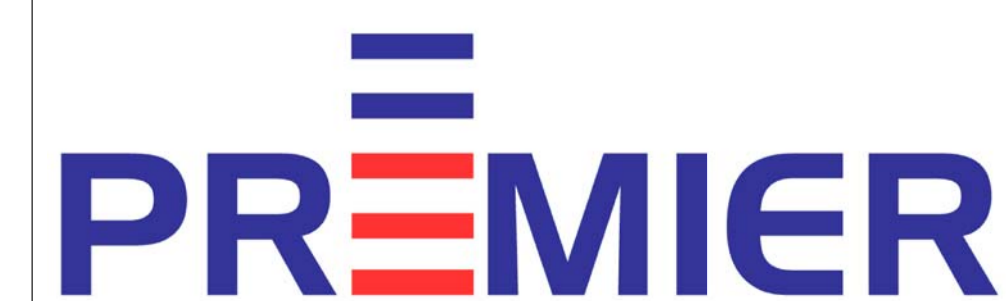

PREMIER LOFT LADDERS
2 Dawson Drive,
Trimley St Mary,
Felixstowe, Suffolk. IP11 0YW

Tel: 0845 9000 195
Fax: 01394 214413

www.premierloftladders.co.uk



© All rights reserved

Report all discrepancies

Do not scale drawings

Other sizes and different ceiling heights are

Date	Name
A 14.09.2013	JP
B 10.08.2014	JP
C 27.07.2017	JP

Elite with wooden backboard

Scale 1:10