


Customer requirements

Specification sheet:

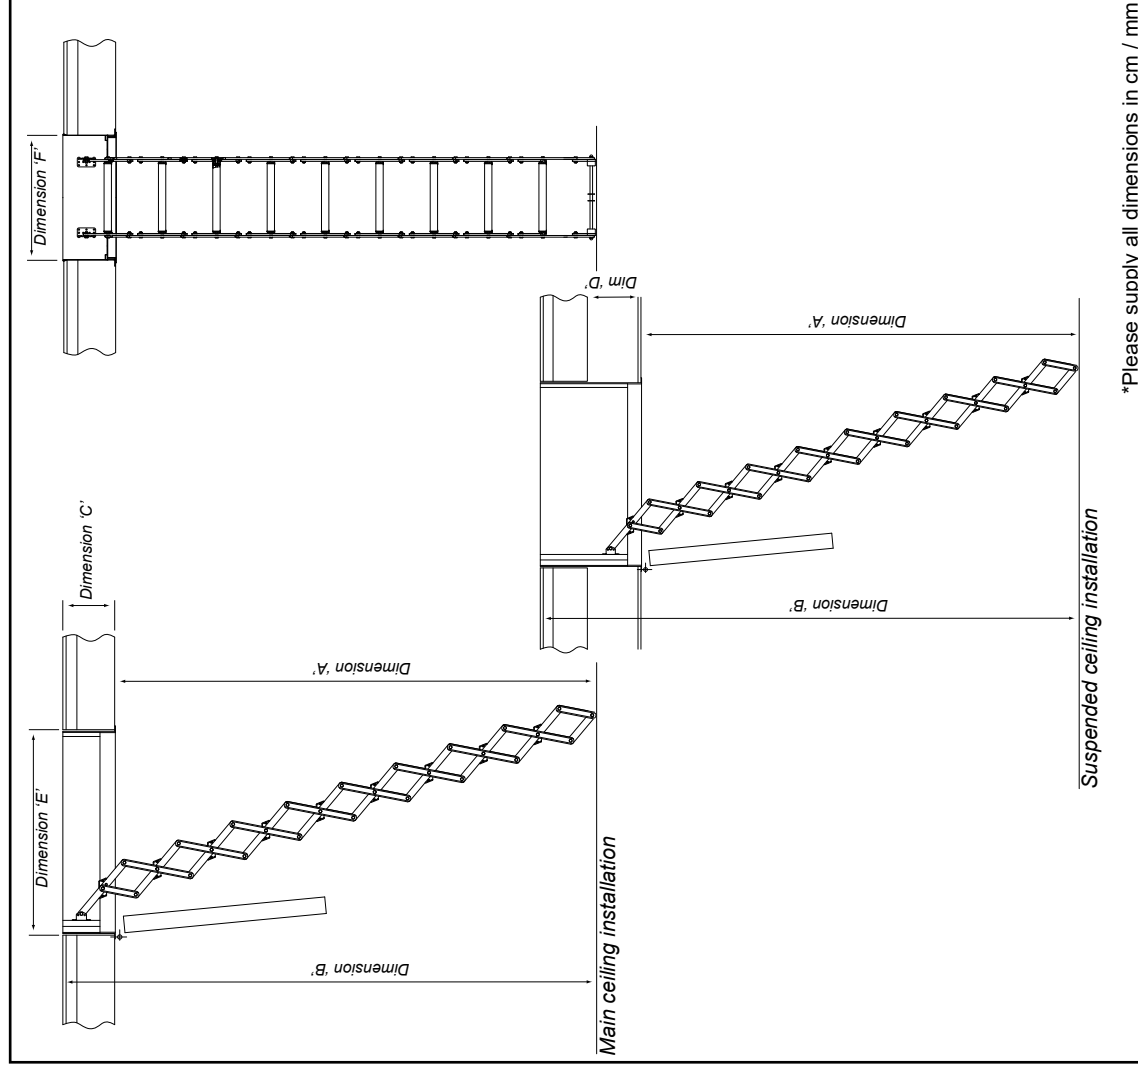

Ecco Stairway:

with a wooden hatchbox and insulated trapdoor

Ecco

U-Value 0.77 W/m² K. The Ecco is supplied as a ready to fit unit, comprising of a stairway manufactured from extruded aluminium alloy components contained within, and attached to, a laminated wood hatchbox and insulated trapdoor. The trapdoor has a white finish to the underside. The unit is manufactured to EN14975 (DIN4570) and has a load bearing per tread of 150kg.

Please see our website or request a brochure for full product details.

Customer name:	
Contact number:	
Project title:	
Date:	
Dimension 'A':	Floor to ceiling
Dimension 'B':	Finished floor to finished floor
Dimension 'C':	Thickness of ceiling
Dimension 'D':	Underside of suspended ceiling to underside of main ceiling
Dimension 'E':	Length of aperture
Dimension 'F':	Width of aperture
Options Required:	<input type="checkbox"/> Telescopic handrail <input type="checkbox"/> 3-sided upper level guardrail <input type="checkbox"/> Secondary upper trapdoor (giving a U-value of 0.46 W/m ² K)

Please tick options required

2 DAWSON DRIVE
TRIMLEY St. MARY
FELIXSTOWE
SUFFOLK. IP11 OYW

TEL No.: 0845 9000 195
WWW.PREMIERLOFTLADDERS.CO.UK
SALES@PREMIERLOFTLADDERS.CO.UK

Please forward a quotation to@..... based on the information detailed above.

Signed:.....

Position:.....

