

MiniLine F30, F30 Plus, F60

Ready to install element

Safety tested: tested according to DIN EN 14975 by TÜV Süd

Airtightness (a value): class 4 - 600pa pressure tested to DIN EN 12207 / 12144 by IFT Rosenheim

Thermal properties: U-Value lower cover = 0.92 W/m²K
Certified according to EN ISO 12567-1 by IFT Rosenheim

Fire Rating: F30 = 30 minutes protection from below. F60 = 60 minutes protection from below.
Certified to DIN4102-2 by MPA Braunschweig. Certified to DIN EN1365-2 / 1363-1. Installation in wood-beamed ceiling (≥ 197mm) or in concrete ceilings (≥150mm).

Stairs:

Scissor unit: Aluminium

Treads: Aluminium profile

Load bearing capacity per tread: 150kg or 350kg/m² of the entire component.

Tread depth: 8cm


Custom sizes:

Custom sizes are available on request

Aperture length depends on the number of treads		Space required in cm		
Treads	Aperture size (length)	Floor to ceiling height "A"	Setdown point "B"	Swivel range "C"
9	100 - 140	200 - 225	113 - 102	123
10	100 - 140	225 - 250	124 - 113	135
11	100 - 140	250 - 275	135 - 124	146
12	100 - 140	275 - 300	146 - 135	158
13	100 - 140	300 - 325	157 - 146	170

Hatchbox external dimensions = aperture size - 1.5 cm

Standard sizes		
Aperture size length x width	Floor to ceiling height "A"	Hatchbox height
110 x 60 cm	225 - 275	22 cm
110 x 70 cm	225 - 275	22 cm
120 x 60 cm	225 - 275	22 cm
120 x 70 cm	225 - 275	22 cm

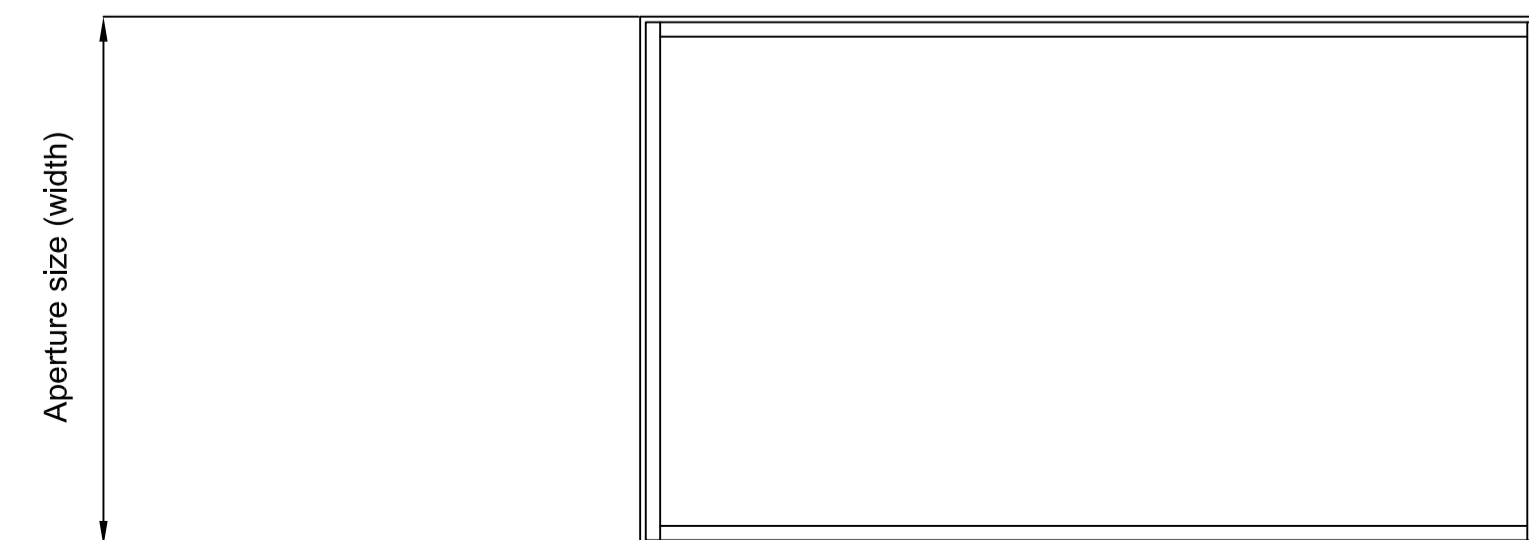

PREMIER LOFT LADDERS
2 Dawson Drive,
Trimley St Mary,
Felixstowe, Suffolk. IP11 0YW
Tel: 0845 9000 195
Fax: 01394 214413
www.premierloftladders.co.uk

Other sizes and different ceiling heights are available on request	Date	Name	MiniLine F30, F30 Plus, F60	Scale 1:10 AT A1
	09.05.2018	JP		
6000495		The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.		

NOTE: ALL INFORMATION CONTAINED IN THIS DOCUMENT IS STRICTLY CONFIDENTIAL. THIS DRAWING IS THE PROPERTY OF PREMIER LOFT LADDERS AND MUST NOT BE REPRODUCED WITHOUT PRIOR PERMISSION.