

Klimatec 160 Passivhaus Loft Ladder

Ready to install element

Airtightness (a value): class 4 - certified to EN 12114 and EN 1026 by TU Graz

Thermal properties: U-Value lower cover = 0.34 W/m²K
Tested by Passivhaus Institut Darmstadt according to Certificate No. 0836as01

Fire Rating: EI₂30 tested according to ÖNORM 3860, EN 1634-1, EN 1363-1

Stairs:

Steel ladder: 3-part or 4-part folding
Load bearing capacity: 250kg
Tread dimensions: 360mm x 120mm


Custom sizes:

Custom sizes are available on request
Aperture length: 1000mm - 1400mm
Aperture width: 500mm - 700mm
Floor to ceiling height: Up to max. 3400mm

Space required in mm

Aperture size (length x width)	Floor to ceiling height "A"	Hatch box height	Setdown point approx. * "B"	Swivel range "C"
1200 x 700	2500 - 2700	480	1130 (2645)	1400 - 1560
1300 x 700	2500 - 2650	480	1115 (2600)	1580 - 1720
1400 x 700	2550 - 2750	480	1145 (2695)	1570 - 1780

*Setdown point varies, depending on floor to ceiling height. Floor to ceiling height shown in brackets

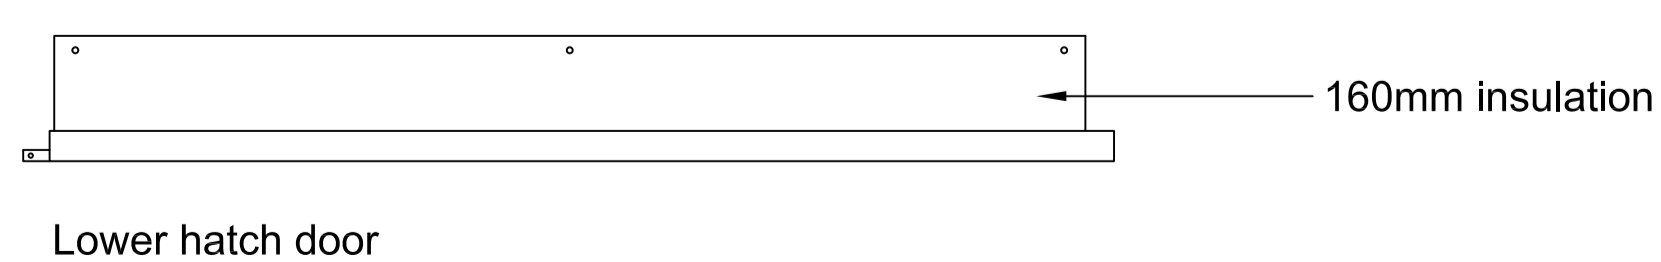

PREMIER LOFT LADDERS
2 Dawson Drive,
Trimley St Mary,
Felixstowe, Suffolk. IP11 0YW
Tel: 0845 9000 195
Fax: 01394 214413
www.premierloftladders.co.uk

Other sizes and different ceiling heights are available on request	Date	Name	Klimatec 160	Scale 1:10 AT A1
	14.06.2018	JP		
7000303		The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.		