

ProfiLine F30, F30 Plus, F60

Ready to install element

Safety tested: Tested according to DIN EN 14975 by TÜV Süd

Airtightness (a value): class 4 - 600pa pressure tested to DIN EN 12207 / 12144 by IFT Rosenheim

Thermal properties: U-Value lower cover = 0.92 W/m²K
Certified according to EN ISO 12567-1 by IFT Rosenheim


Fire Rating: F30 = 30 minutes protection from below. F60 = 60 minutes protection from below. Certified to DIN4102-2 by MPA Braunschweig. Certified to DIN EN1365-2 / 1363-1. Installation in wood-beamed ceiling (≥ 197mm) or in concrete ceilings (≥150mm). F30 Plus = 30 minutes protection from below and above. Certified to DIN4102-2 by MPA Braunschweig. Installation in concrete ceilings (≥150mm).

Stairs:

Wooden ladder: 3-part folding
Load bearing capacity per tread: 150kg or 350kg/m² of the entire component.
Tread dimensions: 33cm x 8cm

Custom sizes:

Custom sizes are available on request

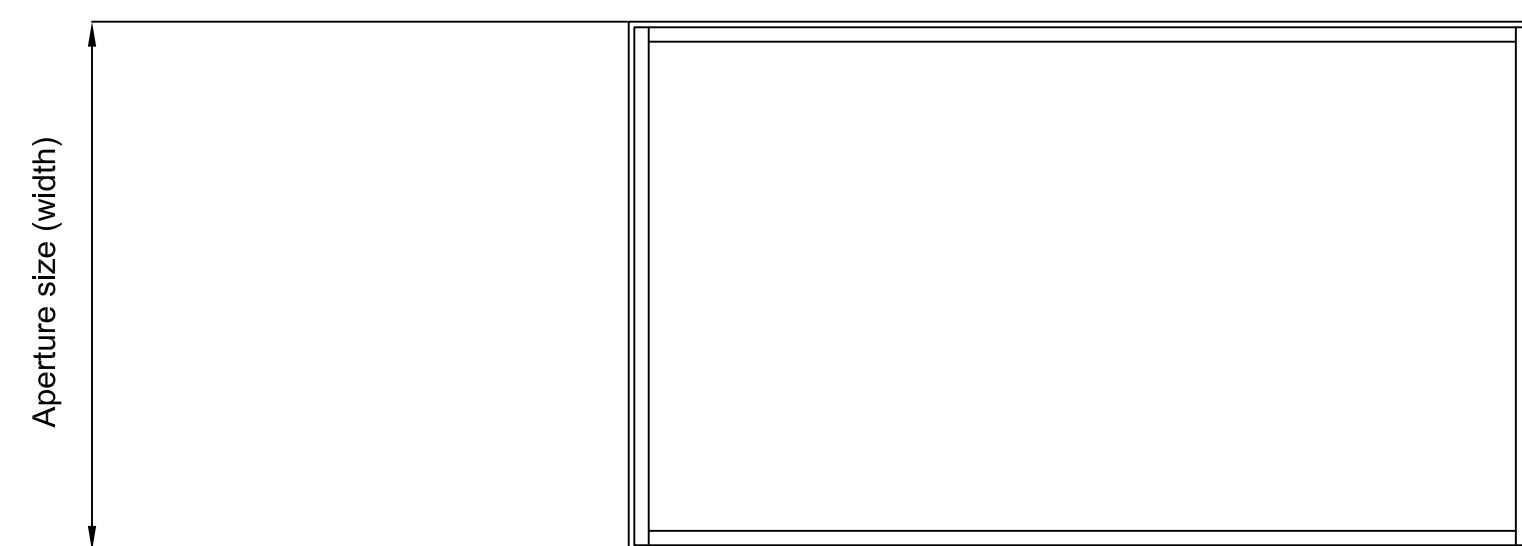

Standard sizes		
Aperture size length x width	Floor to ceiling height "A"	Hatchbox height
120 x 60 cm	234 - 276	22 cm
120 x 70 cm	234 - 276	22 cm
130 x 70 cm	234 - 276	22 cm
140 x 70 cm	234 - 276	22 cm



PREMIER LOFT LADDERS
2 Dawson Drive,
Trimley St Mary,
Felixstowe, Suffolk. IP11 0YW
Tel: 0345 9000 195
Fax: 01394 214413
www.premierloftladders.co.uk



Other sizes and different ceiling heights are available on request	6000463	ProfiLine F30, F30 Plus, F60	Scale 1:10 AT A1
--	---------	------------------------------	------------------

The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.