

## Supreme with wooden hatchbox for flat roofs, 3 additional treads

**Ready to install element**

**Safety tested:** Tested according to DIN EN 14975 by TÜV Süd

**Airtightness (a value):** class 4 - 600pa pressure tested to DIN EN 12207 / 12114 by IFT Rosenheim

**Thermal properties:** U-Value lower cover = 0.58 W/m<sup>2</sup>K

U-Value top cover = (see table below)

Calculation of the isolated area according to EN ISO 6946 by manufacturer

**Stairs:**

Scissor unit: Aluminium

Load bearing capacity per tread: 200kg or 500kg/m<sup>2</sup> of the entire component.

Tread depth: 14cm (16cm)


**Custom sizes:**

Custom sizes are available on request

Aperture length depends on the number of treads		Space required in cm		
Treads	Aperture size (length)	Floor to ceiling height "A"	Setdown point "B"	Swivel range "C"
9	127 - 197	220 - 250	165 - 153	173
10	127 - 197	251 - 279	176 - 163	186
11	137 - 197	280 - 309	187 - 173	198
12	137 - 197	310 - 339	198 - 183	210
13	167 - 197	340 - 369	225 - 212	237
14	177 - 197	370 - 399	238 - 224	251
15	187 - 197	400 - 430	249 - 235	264

Hatchbox external dimensions = aperture size -2cm

Top cover thermal insulation values		
Insulation installed on site "D" max.	U - Value W/m <sup>2</sup> K	Seal type
27 mm	1.1	Single seal
40 mm	0.68	Double seal
80 mm	0.38	Double seal
100 mm	0.31	Double seal

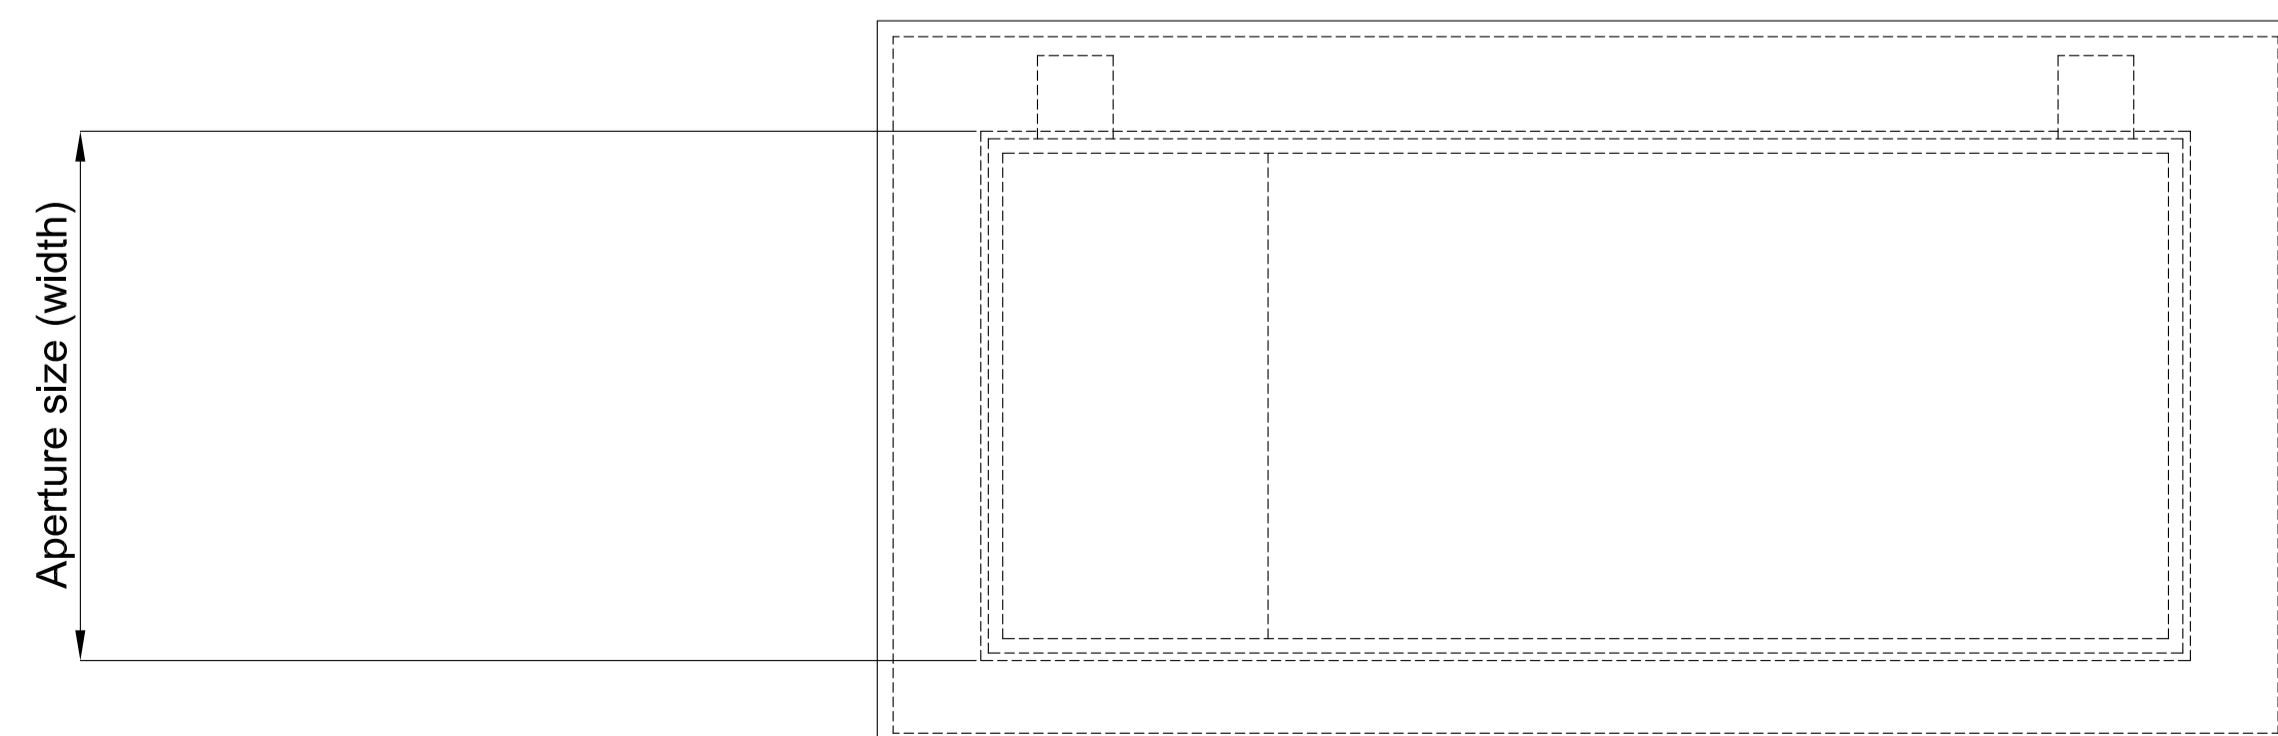

PREMIER LOFT LADDERS  
2 Dawson Drive,  
Trimley St Mary,  
Felixstowe, Suffolk. IP11 0YW  
Tel: 0345 9000 195  
Fax: 01394 214413  
www.premierloftladders.co.uk

© All rights reserved. Report all discrepancies. Do not scale drawings.

Date	Name	Scale
B 10.08.2014	JP	Supreme with wooden hatchbox for flat roofs, 3 additional treads 1:10
C 04.08.2017	JP	
D 10.06.2020	JP	

Other sizes and different ceiling heights are available on request  
**6000213**  
The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.