

## Cadet 3 wooden Loft Ladder...



*...the traditional wooden loft ladder*

The Cadet 3 wooden loft ladder combines traditional styling with quality components and clever design. It offers high-standards of thermal efficiency and is an ideal loft ladder for domestic/residential applications.




### Key benefits at a glance

- Traditional wooden loft ladder design.
- Load capacity of 150 kg per step.
- Good energy efficiency of 0.90 W/m<sup>2</sup>K.
- Wide steps with anti-slip profile for comfort and safety.
- Hatch box trap door finished in white on both sides.
- Available in standard sizes or made-to-order with a range of options and accessories.

## Key features

Material:	Wood
Operation:	3-part folding
Load capacity:	150 kg per step
U-value:	0.90 W/m <sup>2</sup> K
Air permeability:	Class 4 certified
Max floor-to-ceiling height:	2.88 m
Quality:	Compliant to EN 14975 (DN 4570)
Warranty:	2-year full warranty and 10-year parts warranty

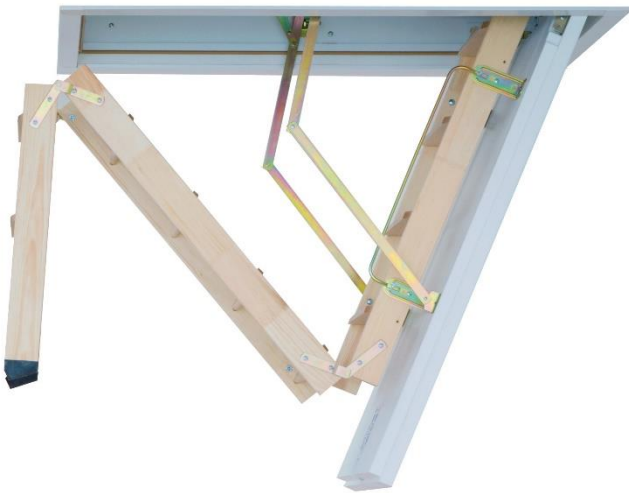

*Cadet 3 wooden loft ladder  
combines traditional styling with  
high standards of thermal  
insulation*

## Overview

The Cadet 3 is a traditional wooden loft ladder that offers an attractive design. It is available in standard or made-to-measure sizes. The Cadet 3 is supplied as a ready to fit unit, consisting of a 3-part folding wooden ladder contained within, and attached to, a wooden hatch box and an insulated trapdoor.

## Standard features

- 3 part folding wooden loft ladder with adjustable tilt
- Traditional wooden loft ladder design
- Load capacity of 150 kg per step
- Supplied assembled in a hatch box with insulated trapdoor
  - Trapdoor supplied with a white finish to both sides
  - Standard hatch box height of 190 mm
  - Snap-lock closure mechanism
- Energy efficient (U-value of 0.90 W/m<sup>2</sup>K, certified according to DIN ISO 12567-1 by IFT Rosenheim)
  - Reducing loss of heat and lowering energy costs
- Airtight hatch box - Class 4 air permeability certified
- Available in standard hatch sizes for floor-to-ceiling heights between 2200 mm and 2880 mm
- Wide steps / treads with anti-slip profile for comfort and safety
  - Step width of 360 mm
  - Step depth of 80 mm
- Supplied ready to install

## Accessories

- WDL insulation and sealing tape for an airtight connection between the loft ladder hatch box and the building (*pictured*)
- Installation/assembly aid
- Protective railing for opening




*WDL insulation and sealing tape  
for an airtight connection between  
hatch box and ceiling*

## Dimensions

The Cadet 3 is available in a range of standard dimensions:

Part number	A Floor-to-ceiling height (mm)	B Opening length (mm)	C Opening width (mm)	D Case height (mm)
CAD-2640-1120-600	2640	1120	600	190
CAD-2640-1120-700	2640	1120	700	190
CAD-2880-1200-600	2880	1200	600	190
CAD-2880-1200-700	2880	1200	700	190
CAD-2880-1300-600	2880	1300	600	190
CAD-2880-1300-700	2880	1300	700	190
CAD-2880-1400-600	2880	1400	600	190
CAD-2880-1400-700	2880	1400	700	190

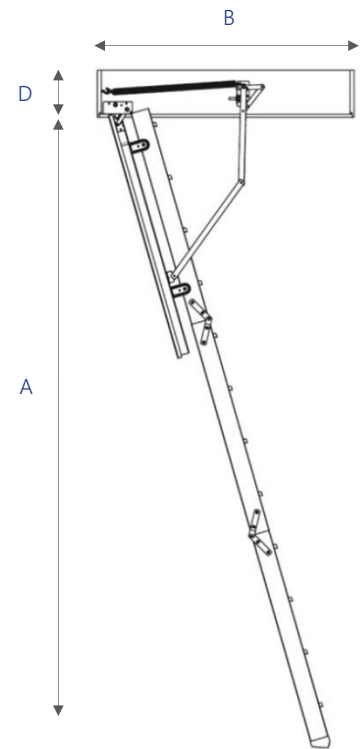

## Quality

The Cadet 3 wooden loft ladder is manufactured to EN 14975 (DN 4570).

Supplied with a 2-year full warranty and 10-year parts warranty.

The  
preferred  
choice



Premier Loft Ladders Ltd

2 Dawson Drive, Trimley St Mary, Felixstowe, IP11 0YW, UK

T: 0345 9000 195

E: [sales@premierloftladders.co.uk](mailto:sales@premierloftladders.co.uk)

W: [www.premierloftladders.co.uk](http://www.premierloftladders.co.uk)