
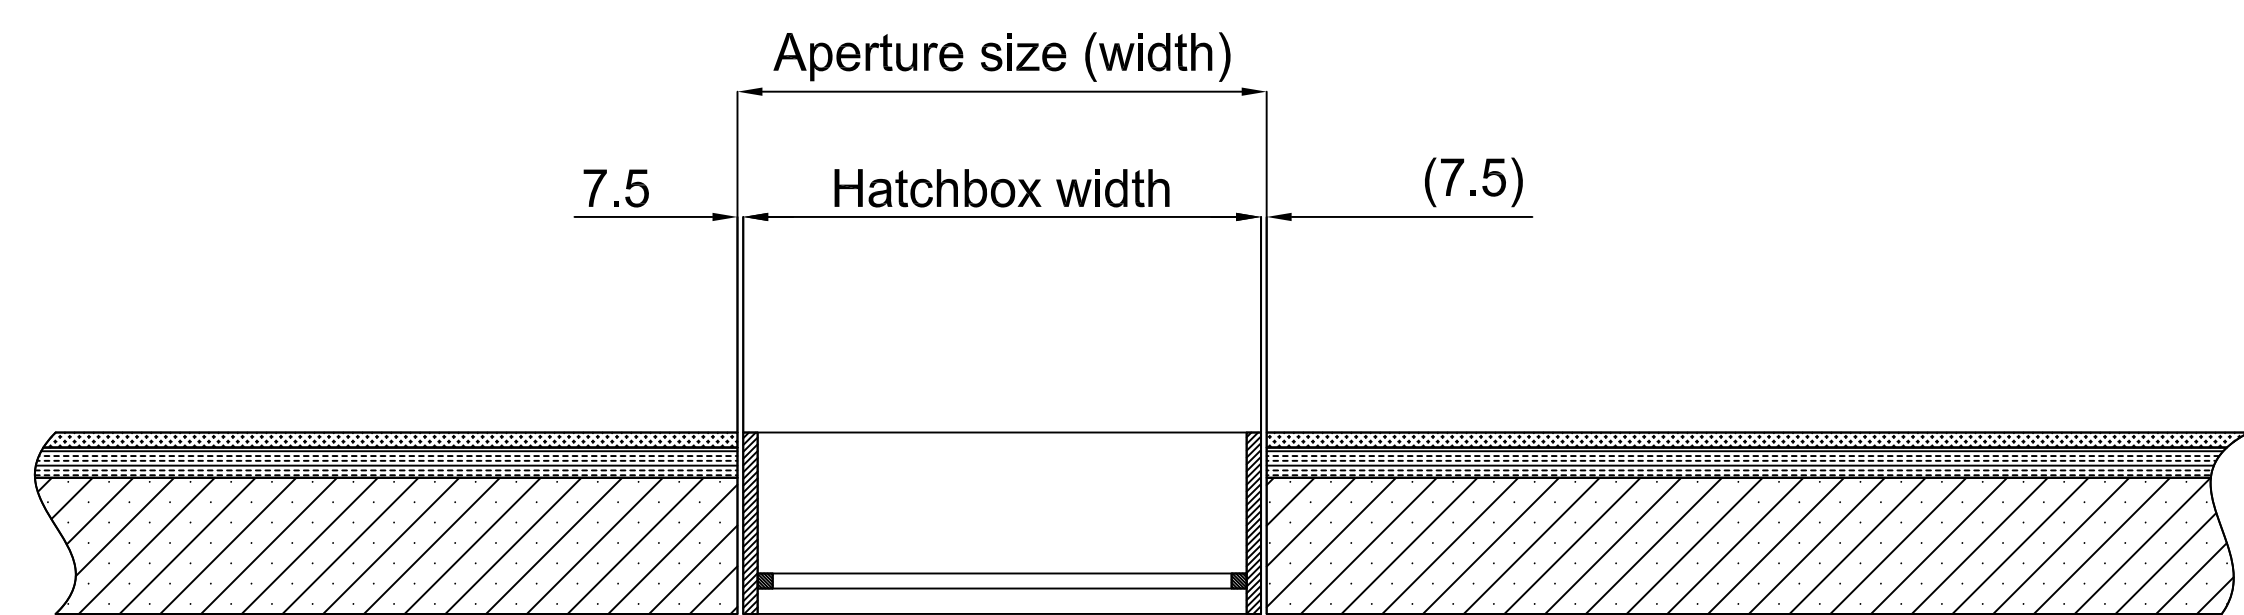
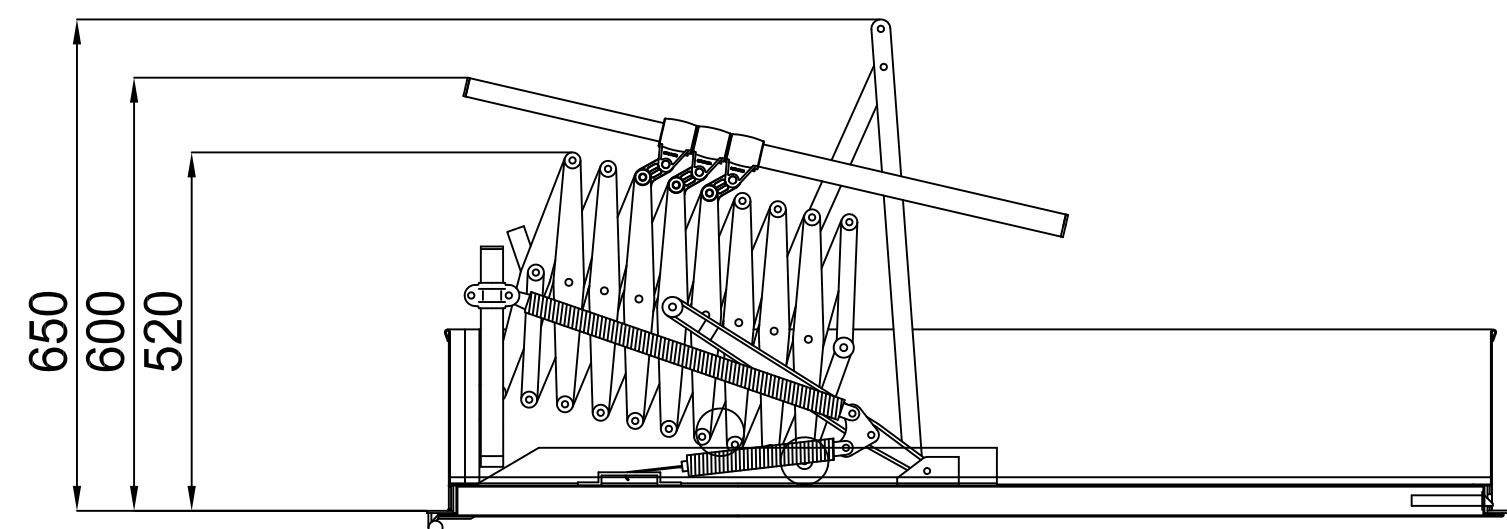


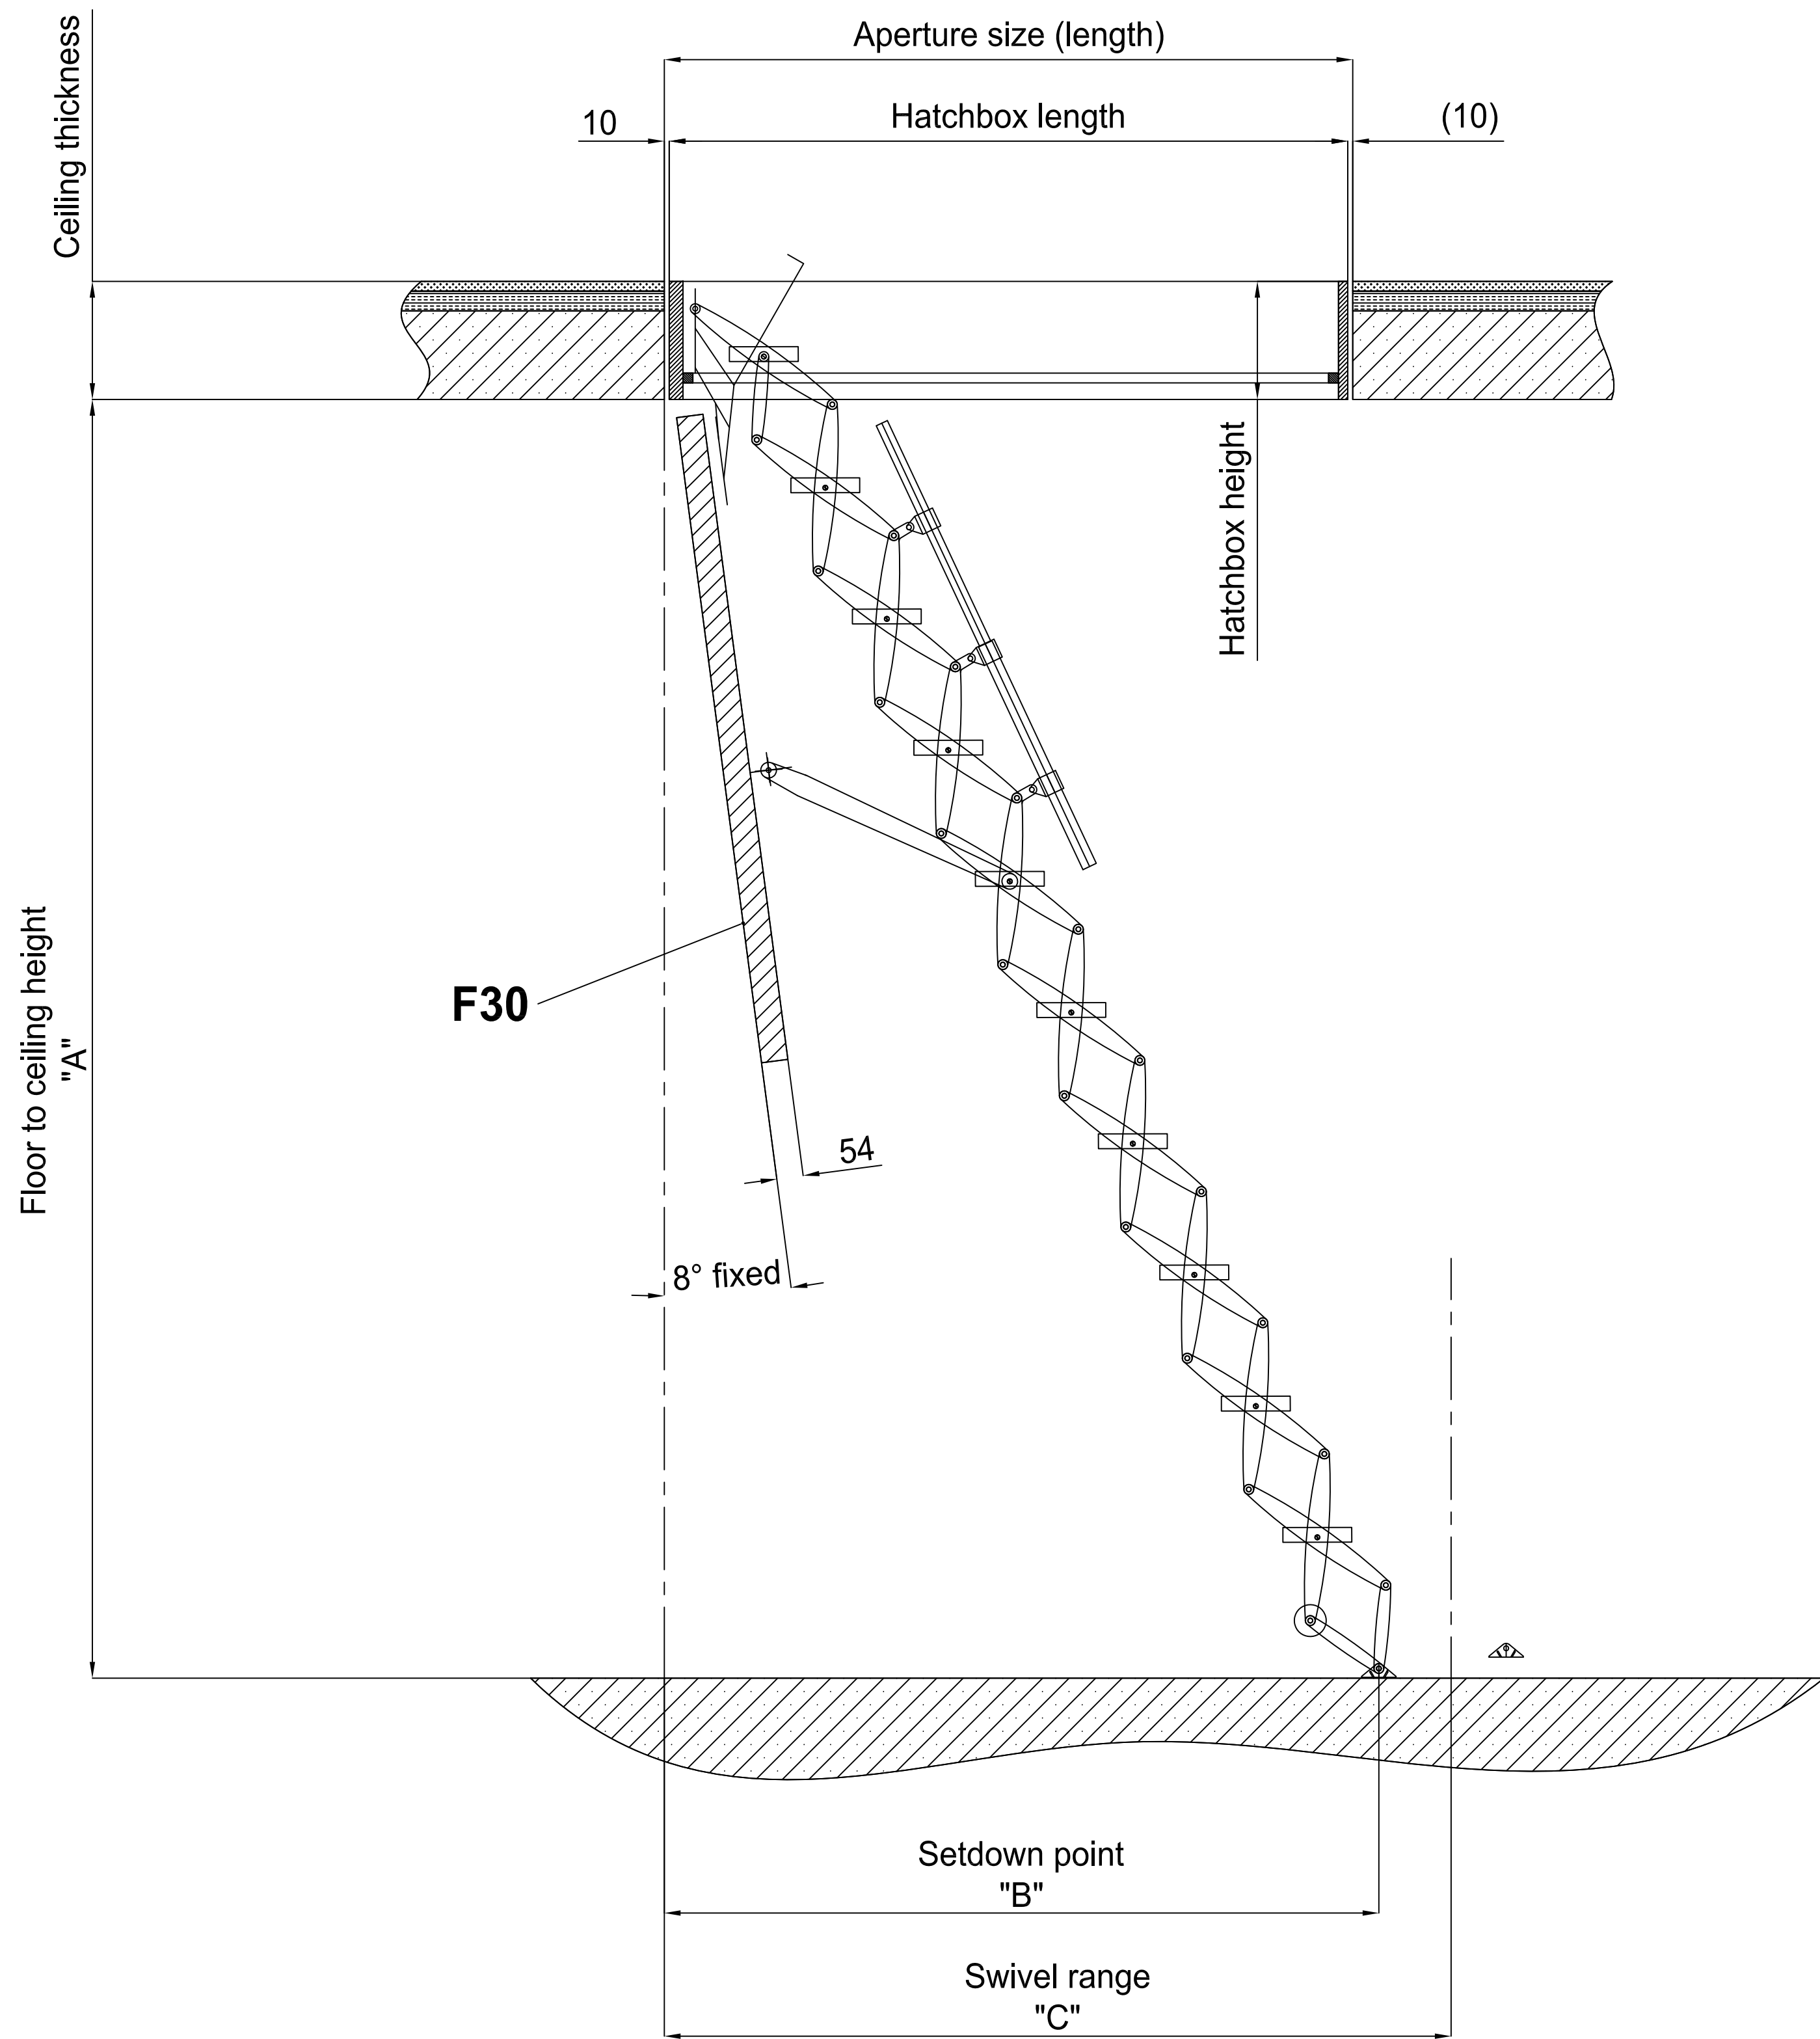

Supreme with wooden hatchbox F30

Ready to install element

Safety tested: Tested according to DIN EN 14975 by TÜV Süd

Airtightness (a value): class 4 - 400pa pressure tested to DIN EN 12207 / 12144 by IFT Rosenheim

Thermal properties: U-Value lower cover = 0.8 W/m²K
U-Value top cover = (see table below)

Calculation of the isolated area according to EN ISO 6946 by manufacturer

Fire rating: F30 = 30 minutes protection from below.

Stairs:

Scissor unit: Aluminium

Load bearing capacity per tread: 200kg or 500kg/m² of the entire component.

Tread depth: 14cm

Custom sizes:

Custom sizes are available on request

Aperture widths from 60cm to 80cm

Aperture length depends on the number of treads		Space required in cm		
Treads	Aperture size (length)	Floor to ceiling height "A"	Setdown point "B"	Swivel range "C"
9	95 - 150	220 - 250	130 - 115	139
10	101 - 150	251 - 279	141 - 125	152
11	110 - 150	280 - 309	152 - 135	164
12	120 - 150	310 - 339	162 - 144	177
13	130 - 150	340 - 369	172 - 153	189
Hatchbox external dimensions = aperture size - 2cm in length, -1.5 in width				

Standard sizes	
Aperture size length x width	Tread width
120 x 60 cm	25 cm
120 x 70 cm	38 cm
130 x 70 cm	38 cm
140 x 70 cm	38 cm

PREMIER
LOFT LADDERS

PREMIER LOFT LADDERS
2 Dawson Drive,
Trimley St Mary,
Felixstowe, Suffolk. IP11 0YW

Tel: 0345 9000 195
Fax: 01394 214413

www.premierloftladders.co.uk



© All rights reserved

Report all discrepancies

Do not scale drawings

Other sizes and different ceiling heights are available on request

6000225

Supreme with wooden hatchbox F30

Scale

1:10

The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.