
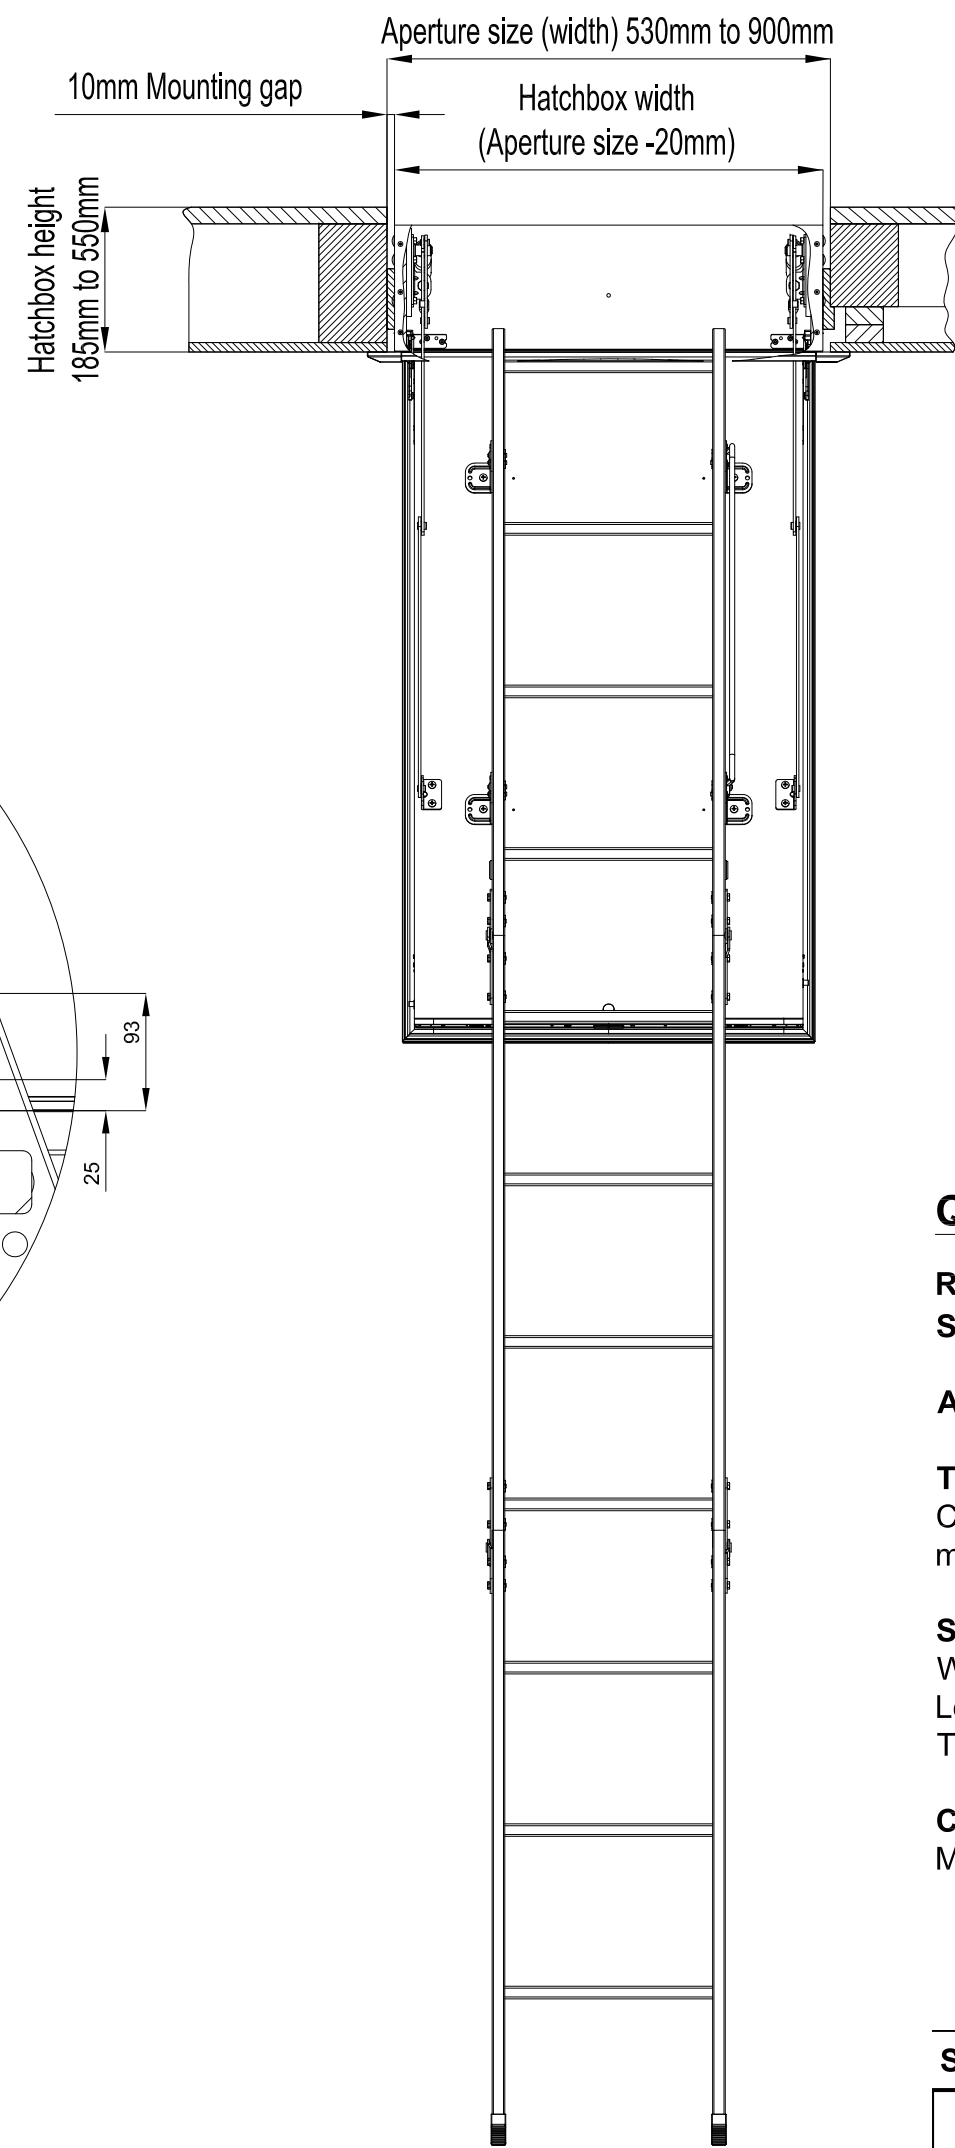


NOTE: ALL INFORMATION CONTAINED IN THIS DOCUMENT IS STRICTLY CONFIDENTIAL. THIS DRAWING IS THE PROPERTY OF PREMIER LOFT LADDERS AND MUST NOT BE REPRODUCED WITHOUT PRIOR PERMISSION.

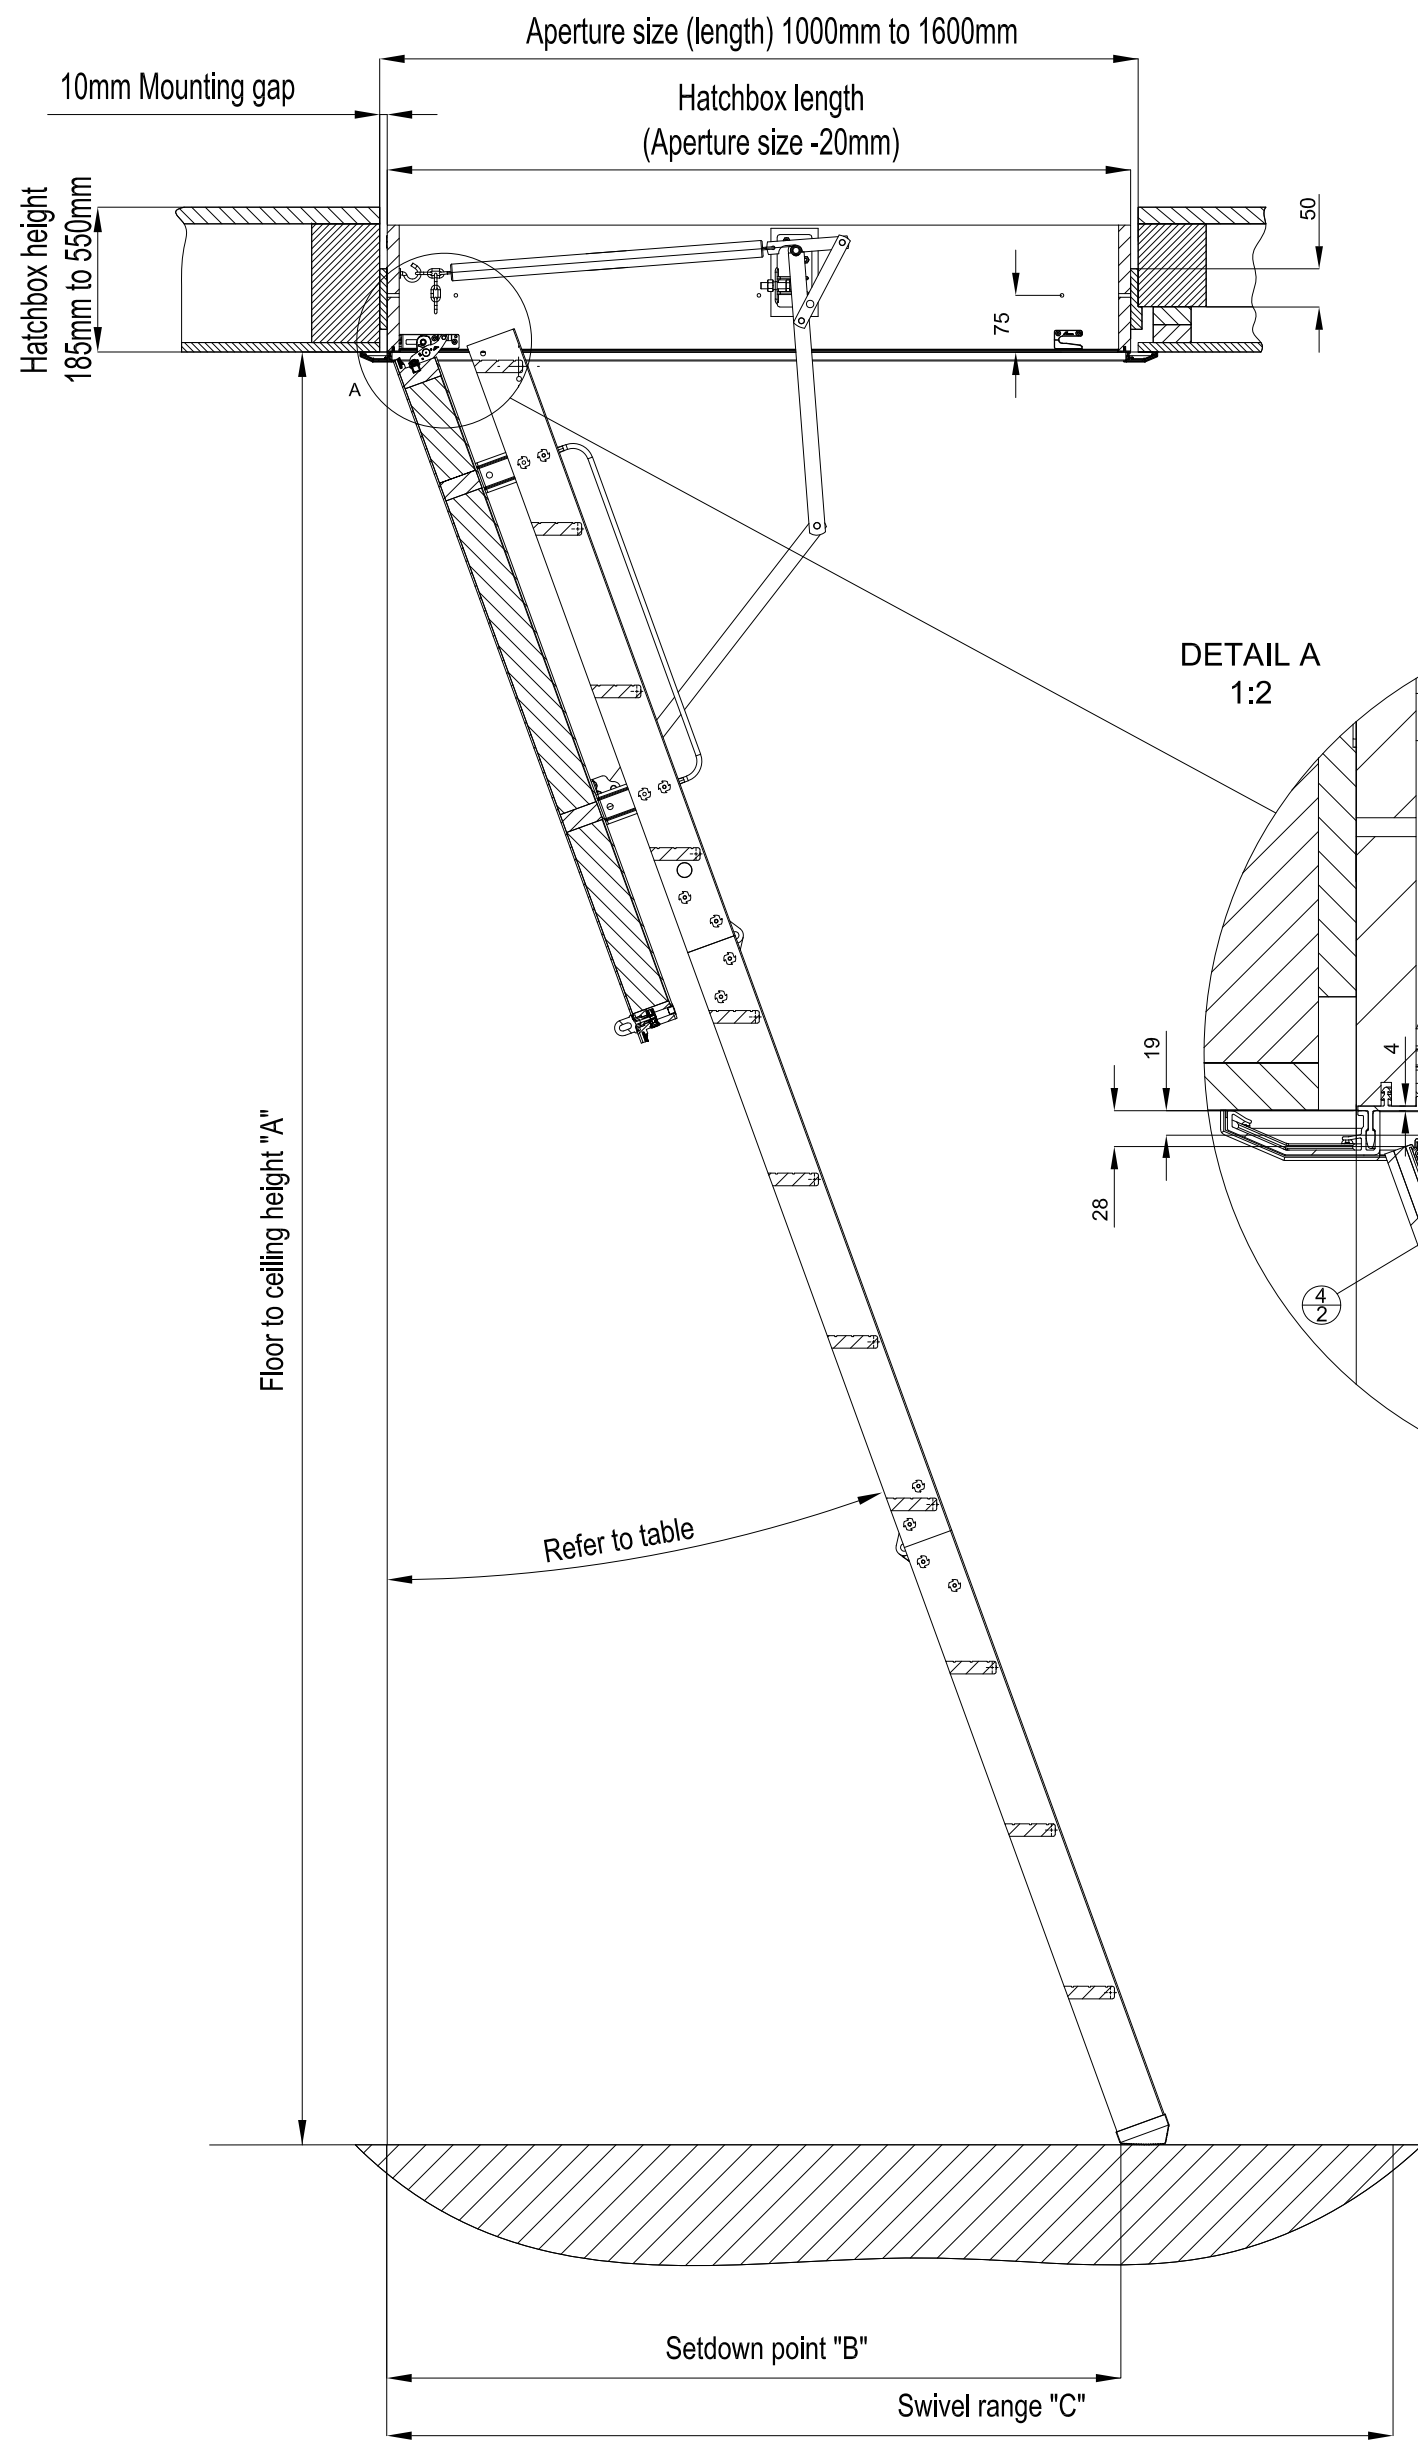

Quadro 3: 3 part folding wooden ladder

Ready to install element
Safety tested: tested according to DIN EN 14975 by TÜV Süd

Airtightness: class 4 - tested to DIN EN 12207 / 12114 by IFT Rosenheim

Thermal Properties: U-Value lower cover 0.77 W/m²K
Calculation of the isolated area according to DIN EN ISO 6946 by manufacturer

Stairs:
Wooden ladder: 3-part folding
Load bearing capacity per tread 150 kg or 350 kg/m² of the entire component
Tread depth: 8cm

Custom sizes:
Made-to-measure

Sizes (all dimensions in mm)				
Aperture length	Floor to ceiling height "A"	Setdown point "B"	Swivel range "C"	Extended stair angle
1000 - 1099	1955 - 2370	770 - 1140	1350 - 1440	15° - 22°
1100 - 1199	2400 - 2800	880 - 1260	1540 - 1630	15° - 21°
1200 - 1399	2400 - 2880	900 - 1495	1570 - 1730	15° - 25°
1400 - 1600	2560 - 3440	975 - 1875	1790 - 2035	15° - 28°



PREMIER LOFT LADDERS
2 Dawson Drive,
Trimley St Mary,
Felixstowe, Suffolk. IP11 0YW
Tel: 0345 9000 195
Fax: 01394 214413
www.premierloftladders.co.uk



©All rights reserved		Report all discrepancies		Do not scale drawings	
Other sizes and different ceiling heights are available on request		Date	Name	Quadro 3: 3 part folding wooden ladder	Scale
	A	28.04.2017	JP		1:10
	B	04.12.2018	JP		
	C	16.08.2022	JP		
	6000426			The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.	