

Overview

Compact aluminium concertina loft ladder without a hatch. Durable retractable ladder constructed from extruded aluminium alloy. Light duty load rating (150kg per tread), primarily used for the residential/domestic projects.

Supplied with spring mechanism to assist with opening and retracting the loft ladder; making it very easy to operate and improving safety. Suitable for very small ceiling openings, a minimum clear aperture width from just 370 mm inside the hatch.

Spring-Assisted | Compact | Light Weight | Ease of Use | Space-Saving



Product Materials & Finish

- Extruded aluminium ladder structure.
- Natural finish steel fixings throughout
- Treads; 280mm / 330mm wide x 80mm deep
- Non-slip feet included as standard
- Operating pole included as standard

Performance




- Light weight
- Easy to install
- Load capacity of 150 kg per step

Optional Accessories

- Telescopic handrail
- Spring hardware set (for existing trapdoor)

Quality

- Manufactured and tested to EN 14975 (certified by TÜV SÜD).
- Supplied with a manufacturer's 2-year full warranty and 10-year parts warranty.

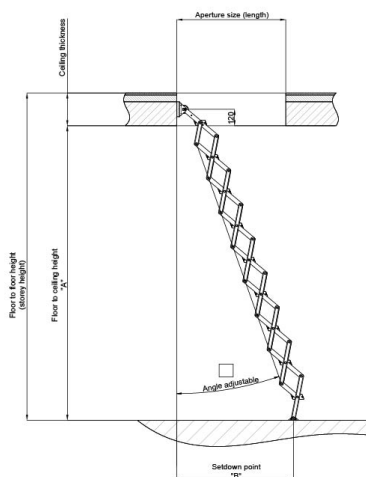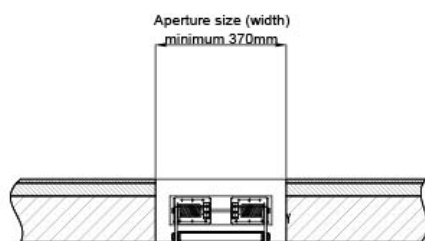

Aperture length depends on the number of treads		Space required in cm	
Treads	Aperture size (length) min.cm	Floor to ceiling height "A"	Set down with a point = 20" "B"
9	55	200 - 225	82 - 91
10	62	225 - 250	91 - 100
11	66	250 - 275	100 - 109
12	70	275 - 300	109 - 118

Custom Widths	
Aperture size (width) min.cm	Tread width
37	28
42	33

Drawings not to scale.

Environment and sustainability

Red listed components - none

Recyclability - Aluminium components can be easily recycled when product reaches end of life