

## ProfiLine EI<sub>2</sub>30, EI<sub>2</sub>30 Plus, EI<sub>2</sub>60

**Ready to install element**

**Safety tested:** Tested according to DIN EN 14975 by TÜV Süd

**Airtightness (a value):** class 4 - 600pa pressure tested to DIN EN 12207 / 12144 by IFT Rosenheim

**Thermal properties:** U-Value lower cover = 0.92 W/m<sup>2</sup>K  
Certified according to EN ISO 12567-1 by IFT Rosenheim

**Fire Rating:** EI<sub>2</sub>30 = 30 minutes protection from below. EI<sub>2</sub>60 = 60 minutes protection from below.  
Tested according to EN1363, EN1364 and ONORM B3860 by IBS Linz. Installation in wood-beamed ceiling or in concrete ceilings. EI<sub>2</sub>30 Plus = 30 minutes protection from below and above.

### Stairs:


Wooden ladder: 3-part folding

Load bearing capacity per tread: 150kg or 350kg/m<sup>2</sup> of the entire component.

Tread dimensions: 33cm x 8cm

### Custom sizes:

Custom sizes are available on request

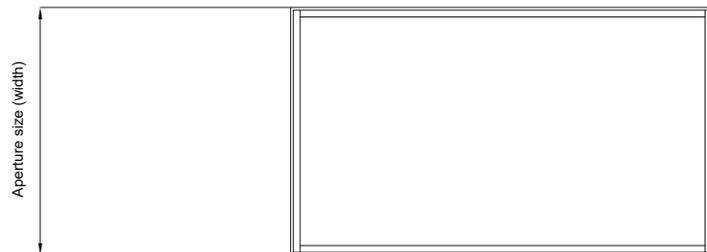

Space required in cm			
Aperture size (length)	Floor to ceiling height "A"	Setdown point "B"	Swivel range "C"
120 - 140	Up to 288	88-104 α = 15°	160
		108-129 α = 20°	168
140 - 150	Up to 356	107-124 α = 15°	200
		132-155 α = 20°	210

Hatchbox external dimensions = aperture size - 1.5cm

Standard sizes		
Aperture size length x width	Floor to ceiling height "A"	Hatchbox height
120 x 60 cm	234 - 276	22 cm
120 x 70 cm	234 - 276	22 cm
130 x 70 cm	234 - 276	22 cm
140 x 70 cm	234 - 276	22 cm



PREMIER LOFT LADDERS  
2 Dawson Drive,  
Trimley St Mary,  
Felixstowe, Suffolk. IP11 0YW  
Tel: 0345 9000 195  
www.premierloftladders.co.uk

© All rights reserved

Report all discrepancies



Other sizes and different ceiling heights are available on request

6000463

ProfiLine EI<sub>2</sub>30, EI<sub>2</sub>30 Plus, EI<sub>2</sub>60

Scale 1:10 AT A1

The data on the drawings is for information only. All dimensions must be checked on site. No responsibility is taken for errors.